



# Table of contents

## Vinyl Laminate Planks ranges

### LOOSELAY

<b>Senso Clic</b>	<b>158</b>
<b>Senso Lock</b>	<b>160</b>

### SELF-ADHESIVE

<b>Senso Limited Edition</b>	<b>164</b>
<b>Senso Rustic</b>	<b>166</b>
<b>Senso Rustic Mix</b>	<b>174</b>
<b>Senso Nautic</b>	<b>176</b>
<b>Senso Futur</b>	<b>178</b>
<b>Senso Classic</b>	<b>180</b>
<b>Senso Romance</b>	<b>182</b>
<b>Senso Origin</b>	<b>184</b>
<b>Vinyl Laminate</b>	<b>186</b>

### DRY BACK

<b>Insight 2.5 / 0.55</b>	<b>190</b>
<b>Artline 2.0 / 0.3</b>	<b>196</b>

<b>Laying and maintenance</b>	<b>240</b>
-------------------------------	------------



# ■ VINYL LAMINATE PLANKS



O511 - Mikado

- Water resistant
- Embossed Surface
- High Realism

# Senso

## SEDUCTION & INNOVATION

SENSO delights the senses with its quality design and graining.

**With 5 exclusive technologies,** SENSO's allure is boundless:




### ANTIQUE STYLE

The irregular bevelled edges on all four sides emphasises the outline of the planks, simulating the feel of worn parquet.



### 3D STYLE

A rustic finish, featuring exclusive dual technology: irregular overlay joints and 4 bevelled edges.

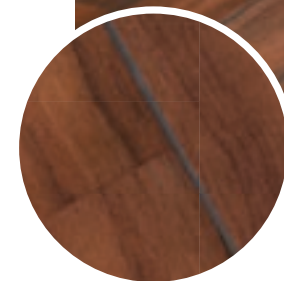

### BOAT STYLE

The boat-deck-style joint creates an attractive marine look.

# VINYL LAMINATE PLANKS

## SENSO, EASY AND ECONOMICAL



Suitable for any rooms in the house, including bathrooms and kitchens



No glue required – only a cutter. Now tile laying is child's play



Easy cleaned with soapy water

## GERFLOR COMFORT & QUALITY



Quiet and ultra-resistant



Complete varnish (plank and joint) for superior long-lasting protection



100% recyclable



### V STYLE

A subtle 4 bevelled edges technology, to highlight the outline of the planks.



### EXTRA LONG EFFECT

### EXTRA LONG EFFECT

The extra long technology combines bevelled long edges and straight end small sides to create maximum perspective.



# Looselay

SENSO CLIC - SENSO LOCK

---

- Glueless
- Easy
- Fast



0385 - Puzzle

**NEW**

# Senso Clic


## Lock-together vinyl laminate planks



Backgammon

Size	Code	EAN
100 x 17.6 cm	3340 0386	3475710255243

**NEW**

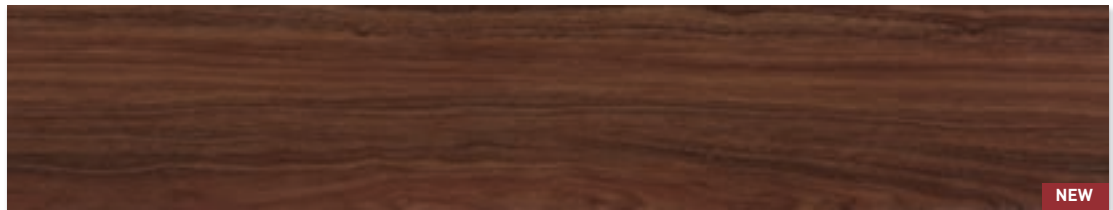

Awale

Size	Code	EAN
100 x 17.6 cm	3340 0352	3475710255236

**NEW**




Mikado

Size	Code	EAN
100 x 17.6 cm	3340 0511	3475710255199

**NEW**




## Clic & Play !



Requires a rubber mallet for laying



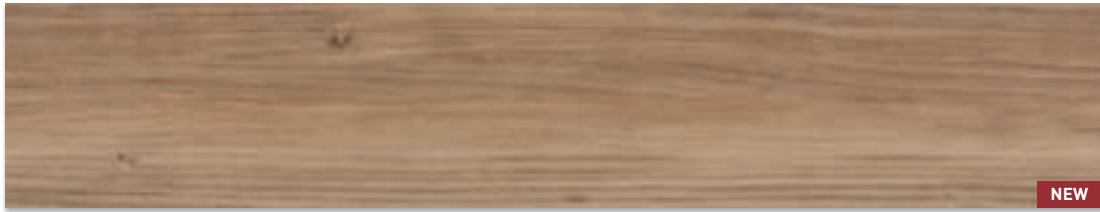

Puzzle

Size Code EAN  
100 x 17.6 cm 3340 0385 3475710255212

NEW



Chess

Size Code EAN  
100 x 17.6 cm 3340 0347 3475710255229

NEW



Domino

Size Code EAN  
100 x 17.6 cm 3340 0384 3475710255205

NEW

Fast track laying: 10m<sup>2</sup>/h  
Gerflor's exclusive vertical-locking  
4 bevelled edges  
Suitable for tiled subfloors



VSTYLE




Senso Clic

Technical characteristics

Dimensions	EN 427	cm	100.0 x 17.6
Total thickness	EN 428	mm	5.0
Wear-layer thickness	EN 429	mm	0.5
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	8560
Fire classificaton	EN 13501-1	class	Bfl-s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	10 planks = 1.8 sqm

CE MARKING



Areas of use: domestic



HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission
- Glueless laying

ENVIRONMENT

- 100% recyclable
- ISO 14001
- Soapy water cleaning



0511 - Aces

**NEW**

# Senso Lock



Vegas

Size	Code	EAN
94 x 15 cm	3339 0493	3475710268373



Aces

Size	Code	EAN
94 x 15 cm	3339 0511	3475710265495



Queen

Size	Code	EAN
94 x 15 cm	3339 0355	3475710265501

## Looselay vinyl laminate planks




- Fiber reinforced
- Easy to lay and remove
- Strong locking



Blackjack

Size	Code	EAN
94 x 15 cm	3339 0327	3475710268403

NEW

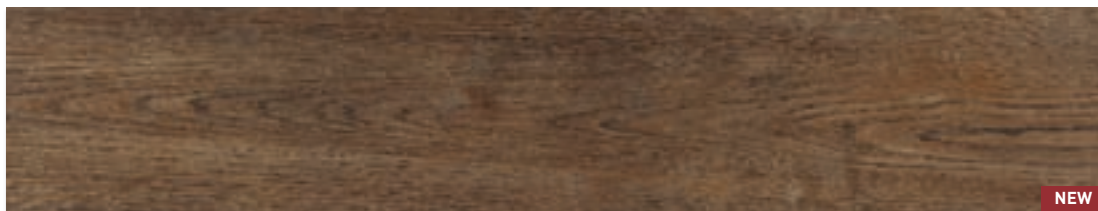

Baccarat

Size	Code	EAN
94 x 15 cm	3339 0498	3475710268366


NEW



Bridge

Size	Code	EAN
94 x 15 cm	3339 0413	3475710268359

NEW

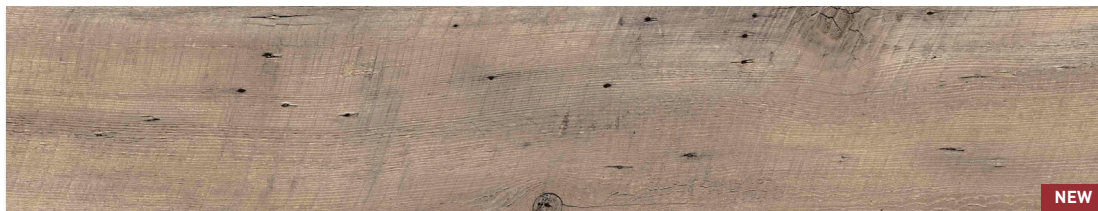

Poker

Size	Code	EAN
94 x 15 cm	3339 0379	3475710268380

NEW



Rummy

Size	Code	EAN
94 x 15 cm	3339 0380	3475710268397


NEW

# Senso Lock

## Technical characteristics

Dimensions	EN 427	cm	94.0 x 15.0
Total thickness	EN 428	mm	4.0
Wear-layer thickness	EN 429	mm	0.30
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	4400
Fire classificaton	EN 13501-1	class	B <sub>fl</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	14 planks = 1.97 sqm

## CE MARKING



Areas of use: domestic




### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission
- Glueless laying

### ENVIRONMENT

- 100% recyclable
- ISO 14001
- Soapy water cleaning

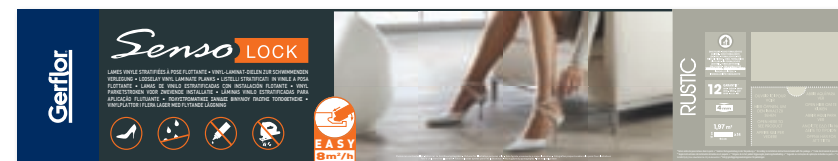



# Self adhesive

## SENSO

---

- Remarkably realistic
- Fashionable
- Easy



0421 - Bistrot

Limited Edition

Limited Edition

Limited Edition

**NEW**

# Senso

## Limited Edition


### Extra long effect



Regatta

Size	Code	EAN
91,4 x 22,9 cm	3334 0420	3475710266102

**NEW**

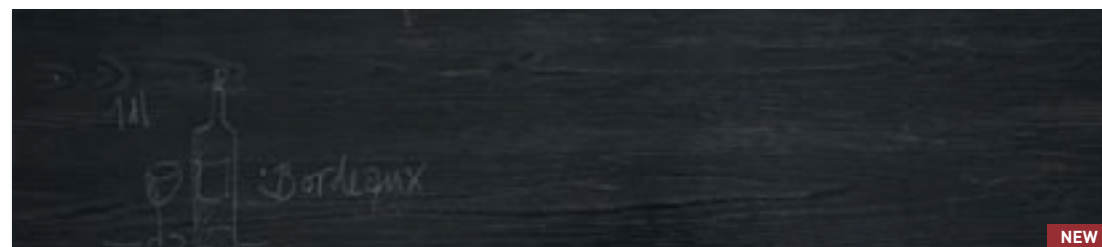

Bistrot

Size	Code	EAN
91,4 x 22,9 cm	3334 0421	3475710266119

**NEW**




Racing

Size	Code	EAN
91,4 x 22,9 cm	3334 0419	3475710266096

**NEW**




REGATTA

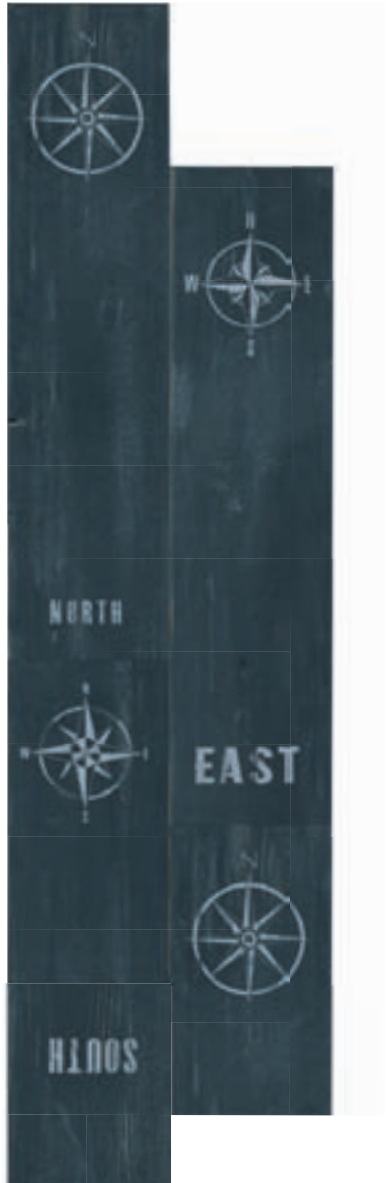

BISTROT



RACING

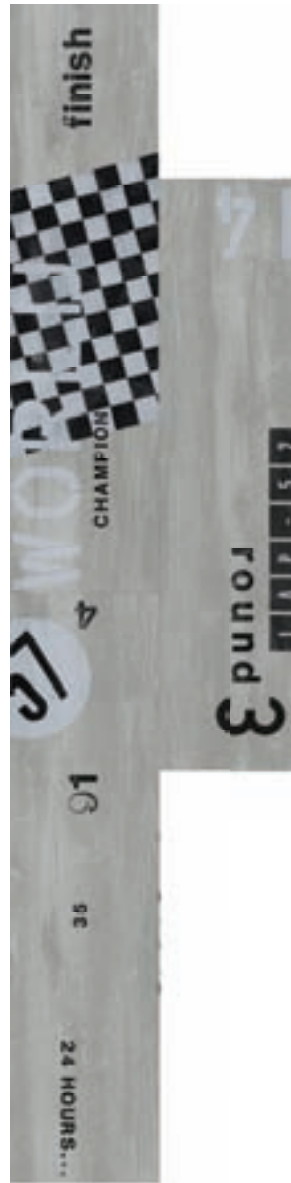

Senso Limited Edition

**EXTRA LONG EFFECT**

New 91,4 x 22,9 cm wide plank size:  
**Unlimited length effect with V Style on long edges and straight ends on small edges**

Technical characteristics			
Dimensions	EN 427	cm	91.4 x 22.9
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.20
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	3920
Fire classification	EN 13501-1	class	B <sub>fl</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	16 planks = 3.3 sqm

**CE MARKING**

CE EN 649

Areas of use: domestic



**HEALTH**

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

**ENVIRONMENT**

- 100% recyclable
- Soapy water cleaning



0269 - Peanut

# Senso Rustic Antique Style



Timber

Size	Code	EAN
91.4 x 15.2 cm	3325 0414	3475710265983

NEW



Muscade

Size	Code	EAN
91.4 x 15.2 cm	3325 0306	3475710247491



Texas

Size	Code	EAN
91.4 x 15.2 cm	3325 0415	3475710265990

NEW



Noisette

Size	Code	EAN
91.4 x 15.2 cm	3325 0311	3475710247507



Cacao

Size	Code	EAN
91.4 x 15.2 cm	3325 0307	3475710247521





Kola

Size	Code	EAN
91.4 x 15.2 cm	3325 0309	3475710247538



Pecan

Size	Code	EAN
91.4 x 15.2 cm	3325 0511	3475710247514



Walnut

Size	Code	EAN
91.4 x 15.2 cm	3325 0310	3475710247569



Peanut

Size	Code	EAN
91.4 x 15.2 cm	3325 0269	3475710247545



Chestnut

Size	Code	EAN
91.4 x 15.2 cm	3325 0270	3475710247552

# Senso Rustic AS

## Technical characteristics

Dimensions	EN 427	cm	91.4 x 15.2
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.20
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	3920
Fire classificaton	EN 13501-1	class	B <sub>f</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	16 planks = 2.2 sqm

## CE MARKING



EN 649



Areas of use: domestic



### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

### ENVIRONMENT

- 100% recyclable
- Soapy water cleaning

ANTIQUE  
STYLE





0353 - Kola

# Senso Rustic 3D Style



Muscade

Size	Code	EAN
91.4 x 15.2 cm	3323 0352	3475710246913



Kola

Size	Code	EAN
91.4 x 15.2 cm	3323 0353	3475710246920



Cacao

Size	Code	EAN
91.4 x 15.2 cm	3323 0351	3475710246906



Candlenut

Size	Code	EAN
91.4 x 15.2 cm	3323 0355	3475710246944



Macadamia

Size	Code	EAN
91.4 x 15.2 cm	3323 0354	3475710246937



Coconut

Size	Code	EAN
91.4 x 15.2 cm	3323 0356	3475710246951



Pecan

Size	Code	EAN
91.4 x 15.2 cm	3323 0350	3475710246890



White Pecan

Size	Code	EAN
91.4 x 15.2 cm	3323 0394	3475710265358

NEW

## Senso Rustic 3DS

### Technical characteristics

Dimensions	EN 427	cm	91.4 x 15.2
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.20
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	3920
Fire classificaton	EN 13501-1	class	Bfl-s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	16 planks = 2.2 sqm

### CE MARKING



EN 14041



Areas of use: domestic



### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

### ENVIRONMENT

- 100% recyclable
- Soapy water cleaning





0408 - Western Noisette

**NEW**

# Senso Rustic

Extra long effect  
3D Style 9'



Western Noisette

Size	Code	EAN
91.4 x 22.9 cm	3333 0408	3475710265341

**NEW**



Vintage

Size	Code	EAN
91.4 x 22.9 cm	3333 0407	3475710265334

**NEW**



Western Gris Bianchi

Size	Code	EAN
91.4 x 22.9 cm	3333 0406	3475710265327

**NEW**



**NEW 91,4 X 22,9 cm wide planks**  
Unlimited length effect with  
3D Style on long edges and straight end  
on small sides








0406 - Western Gris Bianchi

## Senso Rustic 3DS 9'

### Technical characteristics

Dimensions	EN 427	cm	91.4 x 22.9
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.20
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	3920
Fire classificaton	EN 13501-1	class	B <sub>fl</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	16 planks = 3.3 sqm

### CE MARKING

Areas of use: domestic




#### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

#### ENVIRONMENT

- 100% recyclable
- Soapy water cleaning

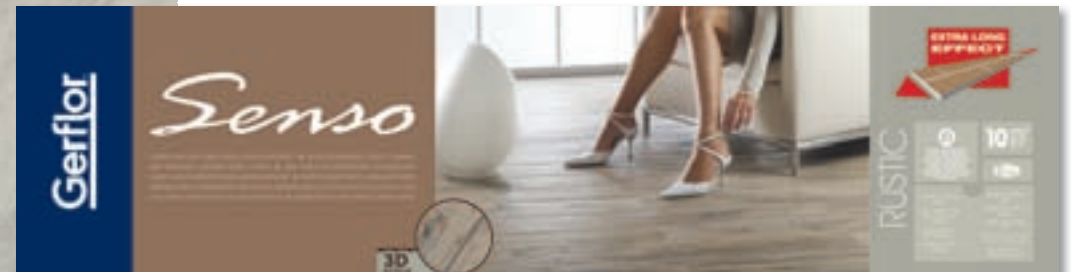



0511 - Pecan

# Senso Rustic

## Straight edges



Muscade

Size	Code	EAN
91.4 x 15.2 cm	3327 0306	3475710250408



Noisette

Size	Code	EAN
91.4 x 15.2 cm	3327 0311	3475710250392




Kola

Size	Code	EAN
91.4 x 15.2 cm	3327 0309	3475710250415




Pecan

Size	Code	EAN
91.4 x 15.2 cm	3327 0511	3475710250385

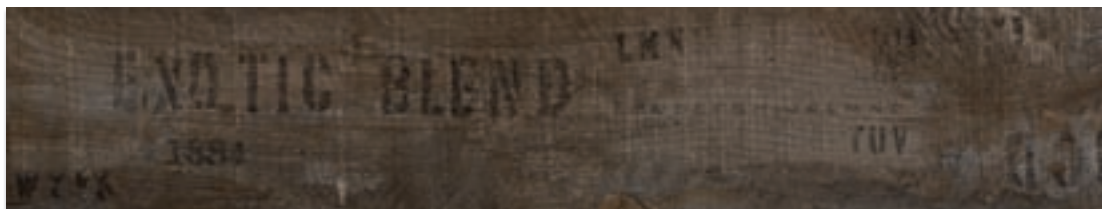

Cargo Dark

Size	Code	EAN
91.4 x 15.2 cm	3327 0271	3475710247576

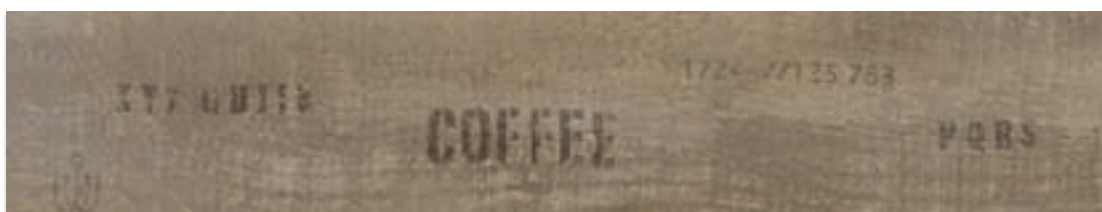

Cargo Light

Size	Code	EAN
91.4 x 15.2 cm	3327 0272	3475710247583



Cajou

Size	Code	EAN
91.4 x 15.2 cm	3327 0308	3475710266805

## Senso Rustic Straight

### Technical characteristics

Dimensions	EN 427	cm	91.4 x 15.2
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.20
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	3920
Fire classificaton	EN 13501-1	class	B <sub>fl</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	16 planks = 2.2 sqm

### CE MARKING

	EN 14041		
--	----------	--	--

Areas of use: domestic



#### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

#### ENVIRONMENT

- 100% recyclable
- Soapy water cleaning





0379 - Vintage Mix

**NEW**

# Senso Rustic Mix

## V Style



Vintage Mix

Size	Code	EAN
91,4 x 15,2 / 22,9 / 7,7 cm	3319 0379	3475710253409



White Mix

Size	Code	EAN
91,4 x 15,2 / 22,9 / 7,7 cm	3319 0378	3475710253393






100% Rustic Spirit !



3 different widths per pack  
 Easy laying with complete rows of same width  
 2 laying patterns recommended on packaging  
 4 bevelled edges planks

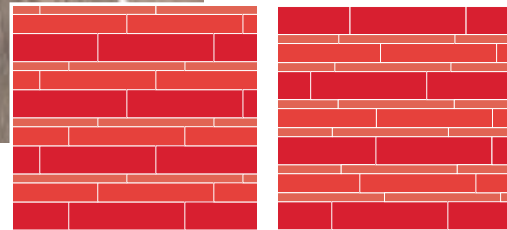


2 recommended laying patterns:



Senso Rustic Mix

Technical characteristics			
Dimensions	EN 427	cm	91.4 x 15.2 / 22.8 / 7.6
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.20
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	3920
Fire classificaton	EN 13501-1	class	B <sub>f1</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	3 x 8 = 16 planks = 3.34 sqm

CE MARKING



Areas of use: domestic



HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT

- 100% recyclable
- Soapy water cleaning




0293 - Durban

# Senso Nautic


## Extra long effect - V Style

### Boat Style

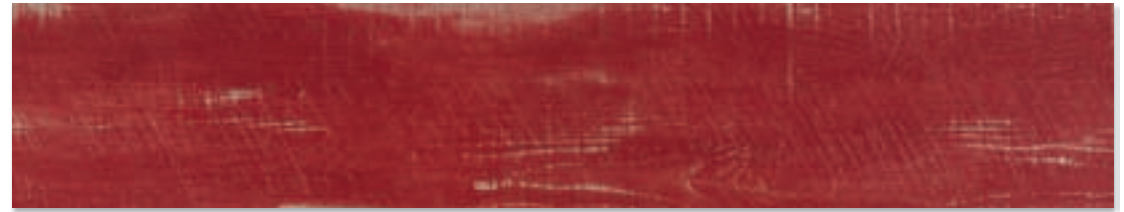

Biarritz

Size	Code	EAN
91.4 x 15.2 cm	3326 0294	3475710247873

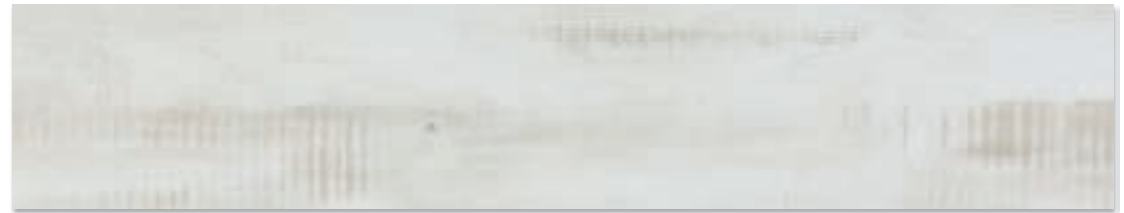

Malibu

Size	Code	EAN
91.4 x 15.2 cm	3326 0292	3475710247859




Durban

Size	Code	EAN
91.4 x 15.2 cm	3326 0293	3475710247866



Ceruse Blanc

Size	Code	EAN
91.4 x 15.2 cm	3326 0301	3475710247897

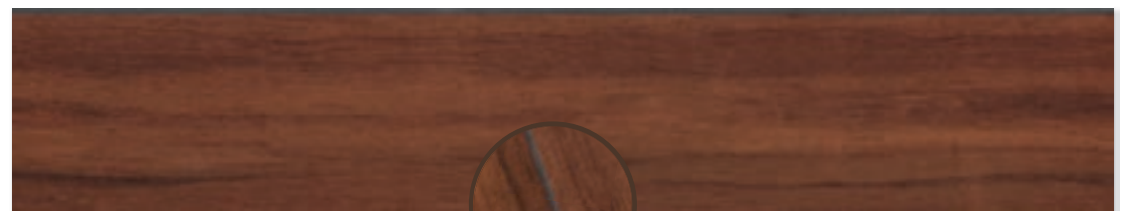

Teck Boat

**BOAT  
STYLE**

Size	Code	EAN
91.4 x 15.2 cm	3326 0328	3475710247903



**NEW 91,4 X 22,9 cm wide planks**  
 Unlimited length effect with  
 V Style on long edges and straight end  
 on small sides



Hossegor

Size	Code	EAN
91.4 x 22.9 cm	3337 0423	3475710266133



Freshwater

Size	Code	EAN
91.4 x 22.9 cm	3337 0424	3475710266140



Kailua

Size	Code	EAN
91.4 x 22.9 cm	3337 0425	3475710266157




**Senso Nautic**

**Technical characteristics**

Dimensions	EN 427	cm	91.4 x 15.2 / 22.9
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.20
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	3920
Fire classificaton	EN 13501-1	class	B <sub>fl</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging 91.4 x 15.2	-	-	16 planks = 2.2 sqm
Packaging 91.4 x 22.9	-	-	16 planks = 3.3 sqm

**CE MARKING**



Areas of use: domestic



**HEALTH**

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

**ENVIRONMENT**

- 100% recyclable
- Soapy water cleaning





0275 - Greytech Light

# Senso Futur V Style




Whitetech

Size	Code	EAN
91,4 x 15,2 cm	3285 0315	3475710234705



Greytech Light

Size	Code	EAN
91,4 x 15,2 cm	3285 0275	3475710247651

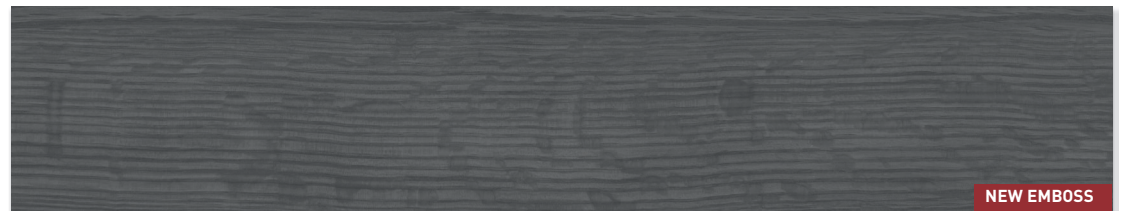

Greytech

Size	Code	EAN
91,4 x 15,2 cm	3285 0317	3475710234729




Filament

Size	Code	EAN
91,4 x 15,2 cm	3285 0238	3475710234736



Plumtech

Size	Code	EAN
91,4 x 15,2 cm	3285 0277	3475710247675

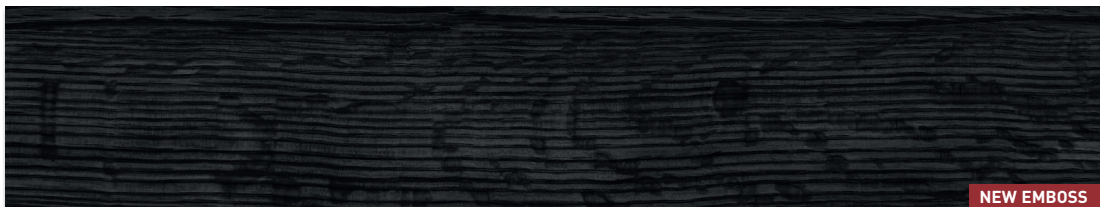

Blacktech

Size	Code	EAN
91,4 x 15,2 cm	3285 0316	3475710234712



Cherrytech

Size	Code	EAN
91,4 x 15,2 cm	3285 0278	3475710247682

Senso Futur

**Technical characteristics**

Dimensions	EN 427	cm	91.4 x 15.2
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.20
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	3920
Fire classificaton	EN 13501-1	class	Bfl-s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	16 planks = 2.2 sqm

**CE MARKING**

	EN 14041			
--	----------	--	--	--

Areas of use: domestic



**HEALTH**

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

**ENVIRONMENT**

- 100% recyclable
- Soapy water cleaning





# Senso Classic

## V Style



Olive Maple

Size	Code	EAN
91,4 x 15,2 cm	3280 0299	3475710247941



Noyer Naturel

Size	Code	EAN
91,4 x 15,2 cm	3280 0018	3475710235238



Honey Pine

Size	Code	EAN
91,4 x 15,2 cm	3280 0297	3475710247927



Beech Honey

Size	Code	EAN
91,4 x 15,2 cm	3280 0323	3475710247965



Merbau Exotic

Size	Code	EAN
91,4 x 15,2 cm	3280 0019	3475710235245



Oak Pine

Size Code EAN  
91,4 x 15,2 cm 3280 0296 3475710247910



Lord

Size Code EAN  
91,4 x 15,2 cm 3280 0413 3475710265976

NEW




Kingdom

Size Code EAN  
91,4 x 15,2 cm 3280 0412 3475710265969

NEW




VSTYLE

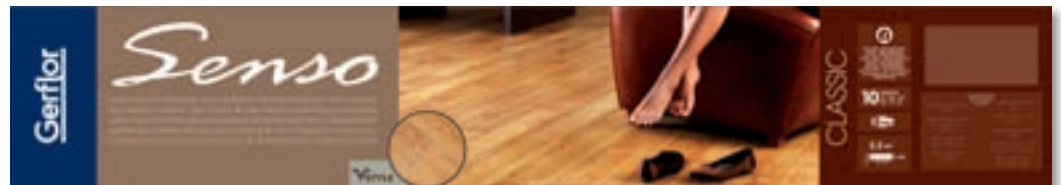

### Technical characteristics

Dimensions	EN 427	cm	91.4 x 15.2
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.20
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	3920
Fire classificaton	EN 13501-1	class	B <sub>fl</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	16 planks = 2.2 sqm

### CE MARKING



Areas of use: domestic



### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

### ENVIRONMENT

- 100% recyclable
- Soapy water cleaning



0254 - White Satin



White Satin

Size	Code	EAN
91,4 x 15,2 cm	3281 0254	3475710247101



Patina Cream

Size	Code	EAN
91,4 x 15,2 cm	3281 0349	3475710235221



Tender Taupe

Size	Code	EAN
91,4 x 15,2 cm	3281 0348	3475710235214

# Senso Romance

## V Style












O254 - White Satin

**Senso Romance**

**Technical characteristics**

Dimensions	EN 427	cm	91.4 x 15.2
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.20
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	3920
Fire classificaton	EN 13501-1	class	B <sub>f1</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	16 planks = 2.2 sqm


**CE MARKING**

Areas of use: domestic



**V**STYLE



**HEALTH**

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

**ENVIRONMENT**

- 100% recyclable
- Soapy water cleaning



0268 - Ebony

# Senso Origin V Style



Bamboo Light

Size	Code	EAN
91,4 x 15,2 cm	3324 0314	3475710247460




Bamboo Dark

Size	Code	EAN
91,4 x 15,2 cm	3324 0267	3475710247477



Ebony

Size	Code	EAN
91,4 x 15,2 cm	3324 0268	3475710247484

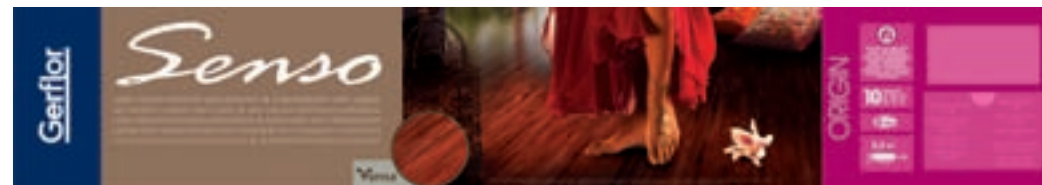







0267 - Bamboo Dark

**Senso Origin**

**Technical characteristics**

Dimensions	EN 427	cm	91.4 x 15.2
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.20
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	3920
Fire classificaton	EN 13501-1	class	B <sub>f1</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	16 planks = 2.2 sqm


**CE MARKING**


 EN 14041
 



**Areas of use:** domestic



**VSTYLE**



**HEALTH**

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

**ENVIRONMENT**

- 100% recyclable
- Soapy water cleaning



# Vinyl Laminate

## Straight edges



Saturn

Size	Code	EAN
91,4 x 15,2 cm	3330 0225	3475710234088



Mars

Size	Code	EAN
91,4 x 15,2 cm	3330 0220	3475710233074




Jupiter

Size	Code	EAN
91,4 x 15,2 cm	3330 0223	3475710233920



Uranus

Size	Code	EAN
91,4 x 15,2 cm	3330 0222	3475710233098

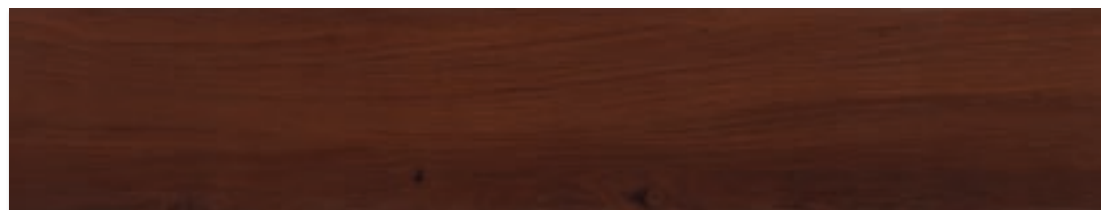

Neptune

Size	Code	EAN
91,4 x 15,2 cm	3330 0224	3475710233999

# Gerflor quality at a good price for special offers




Vinyl Laminate

### Technical characteristics

Dimensions	EN 427	cm	91.4 x 15.2
Total thickness	EN 428	mm	1.8
Wear-layer thickness	EN 429	mm	0.08
Weight	EN 430	g/sqm	3530
Fire classification	EN 13501-1	class	B <sub>f1</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	16 planks = 2.2 sqm

### CE MARKING



Areas of use: domestic



### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

### ENVIRONMENT

- 100% recyclable
- Soapy water cleaning



0425 - Britany Oak

# Dry Back

INSIGHT & ARTLINE

---

- Residential to light commercial
- Traditional installation
- 100% bevelled



0448 - Malua Bay

# Insight 2.5 / 0.55

## V Style



**Malua Bay**  
 Size 91,4 x 15,2 cm  
 Code 3164 0448  
 EAN 3475710246111



**Lorenzo**  
 Size 91,4 x 15,2 cm  
 Code 3164 0446  
 EAN 3475710246098



**Amador**  
 Size 91,4 x 15,2 cm  
 Code 3164 0447  
 EAN 3475710246104



**Aspen**  
 Size 91,4 x 15,2 cm  
 Code 3164 0458  
 EAN 3475710246210





Ranch

Size	91,4 x 15,2 cm
Code	3164 0456
EAN	3475710246197



Long Board

Size	91,4 x 15,2 cm
Code	3164 0455
EAN	3475710246180



Buffalo

Size	91,4 x 15,2 cm
Code	3164 0457
EAN	3475710246203



Michigan

Size	91,4 x 15,2 cm
Code	3164 0461
EAN	3475710246241



Eastern Oak

Size	91,4 x 15,2 cm
Code	3164 0462
EAN	3475710246258



Honey Oak

Size	91,4 x 15,2 cm
Code	3164 0441
EAN	3475710246043



Milord

Size	91,4 x 15,2 cm
Code	3164 0460
EAN	3475710246234



Techno Spirit

Size	91,4 x 15,2 cm
Code	3164 0452
EAN	3475710246159





Asian Bamboo

Size 91,4 x 15,2 cm  
Code 3164 0453  
EAN 3475710246166



Tuscany Walnut

Size 91,4 x 15,2 cm  
Code 3164 0451  
EAN 3475710246142



European Oak

Size 91,4 x 15,2 cm  
Code 3164 0440  
EAN 3475710246036



Milington Oak

Size 91,4 x 15,2 cm  
Code 31640442  
EAN 3475710246050



Natural Bamboo

Size 91,4 x 15,2 cm  
Code 3164 0454  
EAN 3475710246173



Medium Oak

Size 91,4 x 15,2 cm  
Code 3164 0443  
EAN 3475710246067



Natural Cherry

Size 91,4 x 15,2 cm  
Code 3164 0449  
EAN 3475710246128



Light Cherry

Size 91,4 x 15,2 cm  
Code 3164 0450  
EAN 3475710246135





Olive Maple

Size	91,4 x 15,2 cm
Code	3164 0444
EAN	3475710246074




O444 - Olive Mapple



Cambridge

Size	91,4 x 15,2 cm
Code	3164 0465
EAN	3475710246289

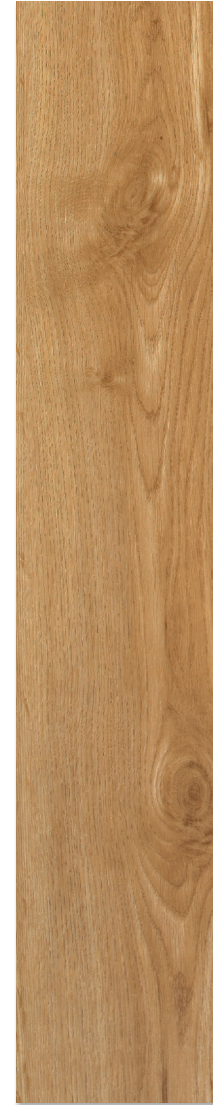

Picadilly

Size	91,4 x 15,2 cm
Code	3164 0464
EAN	3475710246272



Fudge

Size	91,4 x 15,2 cm
Code	3164 0463
EAN	3475710246265



Brownie

Size	91,4 x 15,2 cm
Code	3164 0459
EAN	3475710246227



**Stanmer Park**

Size	122 x 18,4 cm
Code	3161 0427
EAN	3475710245763



**Britany Oak**

Size	122 x 18,4 cm
Code	3161 0425
EAN	3475710245749



**Halvergate**

Size	122 x 18,4 cm
Code	3161 0428
EAN	3475710245770



**Rookery Park**

Size	122 x 18,4 cm
Code	3161 0429
EAN	3475710245787



**Rustic Oak**

Size	122 x 18,4 cm
Code	3164 0445
EAN	3475710246081



**Vintage Oak**

Size	122 x 18,4 cm
Code	3161 0426
EAN	3475710245756



**Impala**

Size	122 x 18,4 cm
Code	3161 0423
EAN	3475710245725





**Canyon**






Size	122 x 18,4 cm
Code	3161 0424
EAN	3475710245732



**Insight 2.5 / 0.55**

Technical characteristics			
Dimensions	EN 427	cm	15.2 x 91.4 / 18.4 x 122
Total thickness	EN 428	mm	2.50
Wear-layer thickness	EN 429	mm	0.55
Weight	EN 430	g/sqm	4410
Fire classificaton	EN 13501-1	class	B <sub>f</sub> -s1 (B1)
Residual indentation	EN 433	mm	≤ 0.1
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging 18.4 x 122	-	-	15 planks = 3.37m <sup>2</sup>
Packaging 15.2 x 91.4	-	-	24 planks = 3.34m <sup>2</sup>
Guarantee residential use	-	-	15 years
Guarantee commercial use	-	-	5 years

**CE MARKING**

**Areas of use:** domestic and light commercial



**HEALTH**

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

**ENVIRONMENT**

- 100% recyclable
- ISO 14001
- Soapy water cleaning



# INSIGHT

2.5mm

0.55mm

x24  
91.4 cm

3.34m<sup>2</sup>

100% RECYCLABLE  
 RECYCLED PAPER  
 RECYCLED GLASS  
 100% RECYCLED  
 POLYURETHANE GLUE





**BEVELLED EDGES**

**NEW**

# Artline 2.0 / 0.3

## V Style



**Ballerina**  
Size 91,4 x 10,1 cm  
Code 3177 0347  
EAN 3475710268281



**Mazurka**  
Size 91,4 x 10,1 cm  
Code 3177 0349  
EAN 3475710268304



**Tempo**  
Size 91,4 x 10,1 cm  
Code 3177 0262  
EAN 3475710268311



**Morris**  
Size 91,4 x 10,1 cm  
Code 3177 0265  
EAN 3475710268328



**Samba**  
Size 91,4 x 10,1 cm  
Code 3177 0348  
EAN 3475710268298



**Country**

Size 91,4 x 15,2 cm  
Code 3176 0494  
EAN 3475710268014



**Flamenco**

Size 91,4 x 15,2 cm  
Code 3176 0493  
EAN 3475710268007



**Tango**

Size 91,4 x 15,2 cm  
Code 3176 0498  
EAN 3475710268052



**Rumba**

Size 91,4 x 15,2 cm  
Code 3176 0502  
EAN 3475710268090



**Quartet**

Size 91,4 x 15,2 cm  
Code 3176 0503  
EAN 3475710268076



**Charleston**

Size 91,4 x 15,2 cm  
Code 3176 0501  
EAN 3475710268083



**Madison**

Size 91,4 x 15,2 cm  
Code 3176 0491  
EAN 3475710267987



**Twist**

Size 91,4 x 15,2 cm  
Code 3176 0504  
EAN 3475710268809



**Jazz**  
 Size 91,4 x 15,2 cm  
 Code 3176 0497  
 EAN 3475710268045



**Boogie**  
 Size 91,4 x 15,2 cm  
 Code 3176 0490  
 EAN 3475710267970



**Calypso**  
 Size 91,4 x 15,2 cm  
 Code 3176 0489  
 EAN 3475710267963



**Swing**  
 Size 91,4 x 15,2 cm  
 Code 3176 0496  
 EAN 3475710268038



**Bamba**  
 Size 91,4 x 15,2 cm  
 Code 3176 0492  
 EAN 3475710267994



**Troika**  
 Size 91,4 x 15,2 cm  
 Code 3176 0495  
 EAN 3475710268021



**Pavane**  
 Size 91,4 x 15,2 cm  
 Code 3176 0499  
 EAN 3475710268069



**Folk**  
 Size 91,4 x 15,2 cm  
 Code 3176 0488  
 EAN 3475710267956












Artline 2.0 / 0.3

Technical characteristics

Dimensions	EN 427	cm	15.2 x 91.4 / 10.1 x 91.4
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.3
Weight	EN 430	g/sqm	3460
Fire classificaton	EN 13501-1	class	B <sub>fl</sub> -s1 (B1)
Residual indentation	EN 433	mm	≤ 0.1
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging 10.1 x 91.4	-	-	36 planks = 3,34 m <sup>2</sup>
Packaging 15.2 x 91.4	-	-	24 planks = 3,34 m <sup>2</sup>

CE MARKING

Areas of use: domestic



- HEALTH**
- Formaldehyde-free
  - Lead-free, no heavy metals
  - Solvent-free
  - No harmful plasticizer
  - Low VOC emission

- ENVIRONMENT**
- 100% recyclable
  - ISO 14001
  - Soapy water cleaning

Gerflor

ARTLINE






BORG BECOUPE  
 BOUILLON D'OR  
 BORG BECOUPE  
 BORG BECOUPE  
 BORG BECOUPE

0490 - Boogie

# Table of contents

## Mineral Composite Tiles ranges

### SELF-ADHESIVE

Caractère Distinctive	206
Caractère Urban	208
Caractère Trend	210
Caractère Village	212
Senso Rustic Tiles	214

### DRY BACK

Insight	218
Artline	222

Laying and maintenance	240
------------------------	-----




O410 - Citizen Black

# ■ MINERAL COMPOSITE TILES



- High Resistance
- Easy and Quick laying
- Innovative

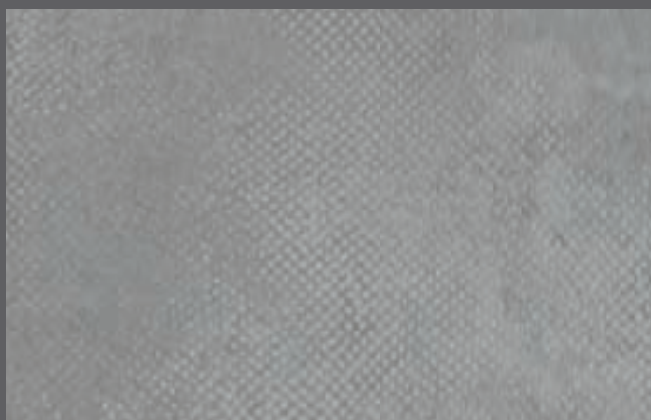

# Self adhesive

---

CARACTERE & SENSO

- Attractive
- Innovative
- Easy




## THE SECRET?

### The development of a revolutionary new material!

The 80% mineral and 20% vinyl composition of CARACTERE provides it both mineral resistance and vinyl convenience.


#### → Composition

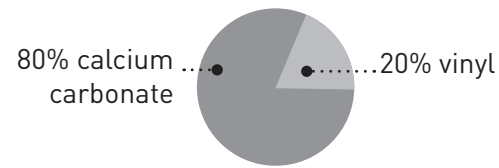

#### → Advantages

**Calcium carbonate** is what provides these tiles with their many advantages: strength, beauty, and more...

**Vinyl** ensures the ease of use you expect from a modern material – from installation to maintenance.

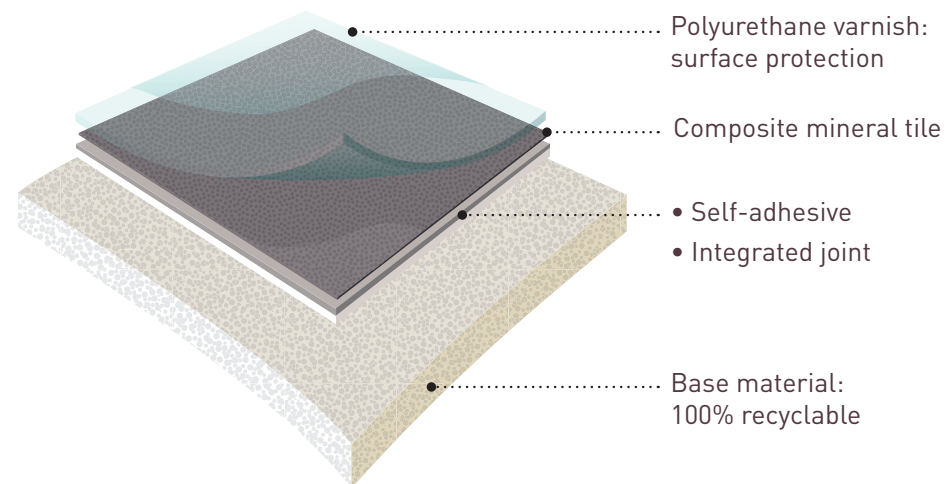


# TECHNOLOGY AT THE HEART OF DESIGN



## V-STYLE

Vstyle has a **4 bevelled edge finish**. Ideal for patterns featuring edge-to-edge installation. Vstyle highlights the visible outline of the tile.

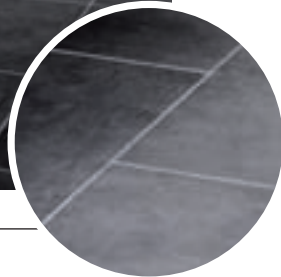

## U-STYLE

This tile has a pre-formed 1mm light-coloured concrete grout line around the circumference. The smart-looking finish has a perfectly straight 2mm grout line. **The easiest and most realistic do-it-yourself tiling.**

MIX AND MATCH DIFFERENT FORMATS TO PRODUCE AN ORIGINAL PATTERN

## CARACTÈRE, EASY AND ECONOMICAL



Suitable for any room in the house, including bathrooms and washrooms



Only a tile cutter is required - no glue, no joint, no tile spacer, no tools!



8m<sup>2</sup> per hour : installed 3 times faster than regular tiles, without no risk of staining or dust

## GERFLOR COMFORT & QUALITY



Quiet and ultra-resistant to stains and scratches



Superior long-lasting varnish protection




Easily cleaned using soapy water



100% recyclable



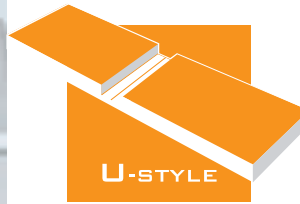

**NEW EMBOSSING  
ON SMOOTH  
CONCRETE:**  
even more resistant

0253 - Light Sugar


# Carattere Distinctive U Style



**NEW EMOSS**


Light Sugar

Size	Thickness	Code	EAN
30,5 x 60,9 cm	3 mm	4596 0253	3475710247095
60,9 x 60,9 cm	3 mm	4598 0253	3475710247118

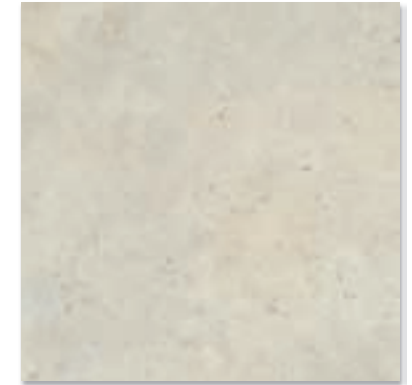

Vanilla


Size	Thickness	Code	EAN
40,6 x 40,6 cm	3 mm	4597 0233	3475710220852
60,9 x 60,9 cm	3 mm	4598 0233	3475710220876

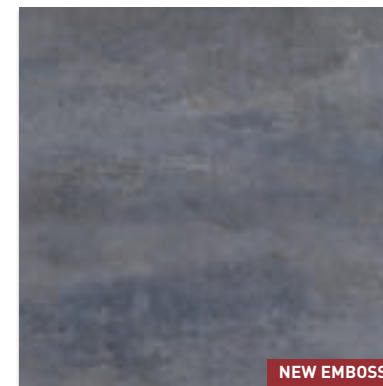

**NEW EMOSS**

Sugar

Size	Thickness	Code	EAN
30,5 x 60,9 cm	3 mm	4596 0231	3475710220838
60,9 x 60,9 cm	3 mm	4598 0231	3475710220890

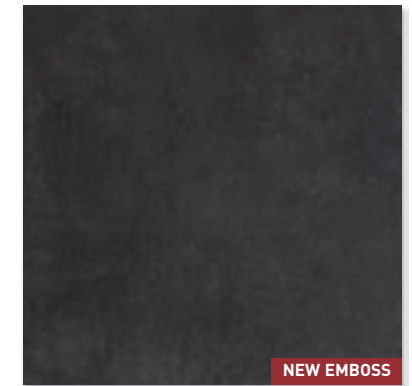

**NEW EMOSS**

Capuccino


Size	Thickness	Code	EAN
60,9 x 60,9 cm	3 mm	4598 0232	3475710220869



**NEW EMOSS**

Moka

Size	Thickness	Code	EAN
30,5 x 60,9 cm	3 mm	4596 0234	3475710232879
60,9 x 60,9 cm	3 mm	4598 0234	3475710220883

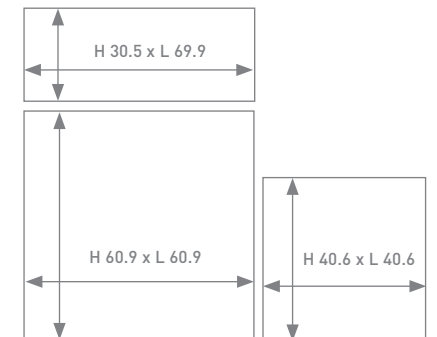





O233 - Vanilla

## Caractère Distinctive

### Technical characteristics

Dimensions	EN 427	cm	40.6 x 40.6 / 30.5 x 60.9 / 60.9 x 60.9
Total thickness	EN 428	mm	3.0
Wear-layer thickness	EN 429	mm	0.30
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	5590
Fire classification	EN 13501-1	class	B <sub>f1</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging 40.6 x 40.6	-	-	11 tiles = 1.8 sqm
Packaging 30.5 x 60.9	-	-	11 tiles = 2 sqm
Packaging 60.9 x 60.9	-	-	7 tiles = 2.6 sqm

### CE MARKING

	EN 14041			
--	----------	--	--	--

Areas of use: domestic



#### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

#### ENVIRONMENT

- 100% recyclable
- 80% mineral
- Soapy water cleaning




0258 - Metro

# Caractere Urban

## V Style - U Style




**NEW EMBOSING  
ON SMOOTH  
CONCRETE:**  
even more resistant

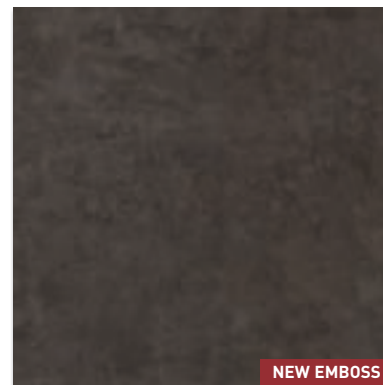


Concrete

Size	Thickness	Code	EAN
45,7 x 30,5 cm	2 mm	4584 0205	3475710247293
45,7 x 45,7 cm	2 mm	4585 0205	3475710247323

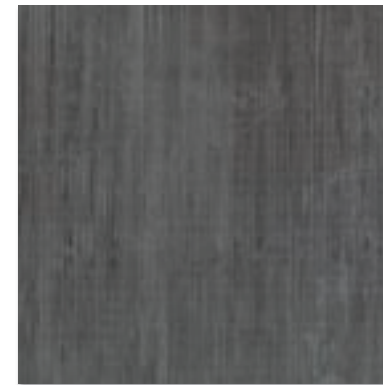

Metro

Size	Thickness	Code	EAN
45,7 x 45,7 cm	2 mm	4585 0258	3475710247361

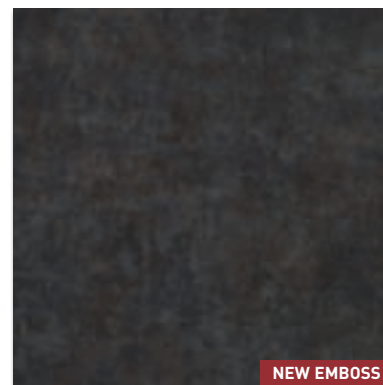



Basalt

Size	Thickness	Code	EAN
45,7 x 30,5 cm	2 mm	4584 0236	3475710247316
45,7 x 45,7 cm	2 mm	4585 0236	3475710247347



Tramway



Size	Thickness	Code	EAN
45,7 x 45,7 cm	2 mm	4585 0255	3475710247354

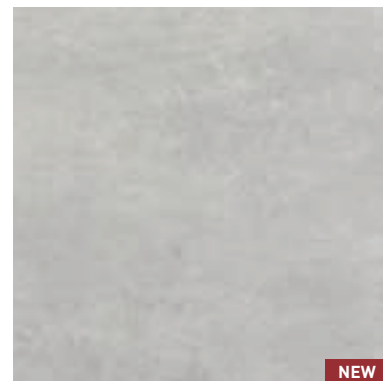

Apollo

Size	Thickness	Code	EAN
45,7 x 30,5 cm	2 mm	4584 0409	3475710265518



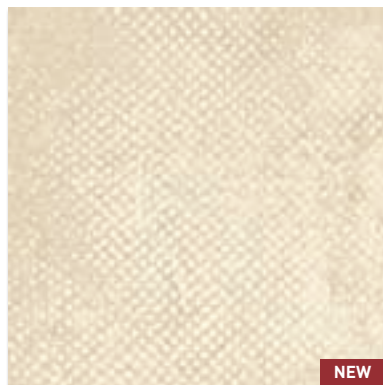

NEW

Citizen Ivory

Size	Thickness	Code	EAN
60.9 x 30.5 cm	3 mm	3335 0427	3475710266591



NEW

Citizen Grey

Size	Thickness	Code	EAN
60.9 x 30.5 cm	3 mm	3335 0426	3475710266584



NEW

Citizen Black

Size	Thickness	Code	EAN
60.9 x 30.5 cm	3 mm	3335 0410	3475710265723



**CITIZEN:**  
a new exclusive  
emboss

Caractère Urban


**Technical characteristics**

Dimensions	EN 427	cm	45.7 x 30.5 45.7 x 45.7 60.9 x 30.5
Total thickness V Style	EN 428	mm	2.0
Total thickness U Style	EN 428	mm	3.0
Wear-layer thickness V Style	EN 429	mm	0.20
Wear-layer thickness U Style	EN 429	mm	0.30
Surface treatment	-	-	PUR
Weight V Style	EN 430	g/sqm	3425
Weight U Style	EN 430	g/sqm	5590
Fire classification	EN 13501-1	class	B <sub>f</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging 45,7 x 30,5			11 tiles = 1.5 sqm
Packaging 45.7 x 45.7	-	-	7 tiles = 1.5 sqm
Packaging 60.9 x 30,5	-	-	11 tiles = 2.0 sqm
Unit 45,7 x 30,5	-	-	4 packs = 6 sqm
Unit 45,7 x 45,7	-	-	3 packs = 4.5 sqm

**CE MARKING**

	EN 14041		
--	----------	--	--

**Areas of use: domestic**



- HEALTH**
- Formaldehyde-free
  - Lead-free, no heavy metals
  - Solvent-free
  - No harmful plasticizer
  - Low VOC emission

- ENVIRONMENT**
- 100% recyclable
  - 80% mineral
  - Soapy water cleaning




Caractère Urban



0259 - Moonraker


# Carattere Trend

## V Style

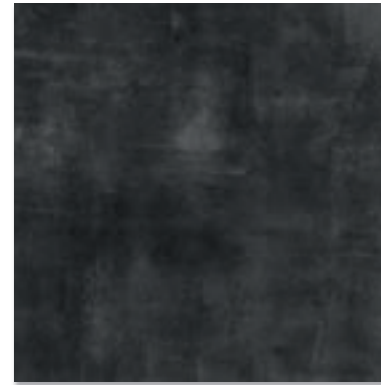

Moonraker

Size	Thickness	Code	EAN
60,9 x 30,5 cm	3 mm	4582 0259	3475710247378
60,9 x 60,9 cm	3 mm	4583 0259	3475710247439

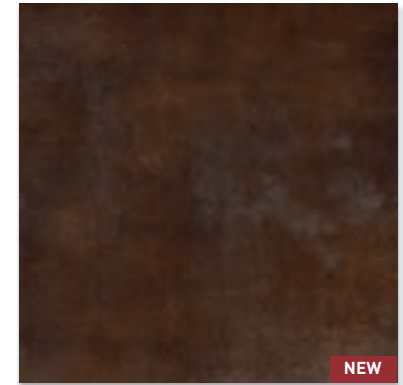

NEW

Oxyda

Size	Thickness	Code	EAN
45,7 x 30,5 cm	2 mm	4590 0405	3475710265433




Paris

Size	Thickness	Code	EAN
60,9 x 60,9 cm	3 mm	4583 0263	3475710247408



Manhattan


Size	Thickness	Code	EAN
60,9 x 60,9 cm	3 mm	4583 0264	3475710247415

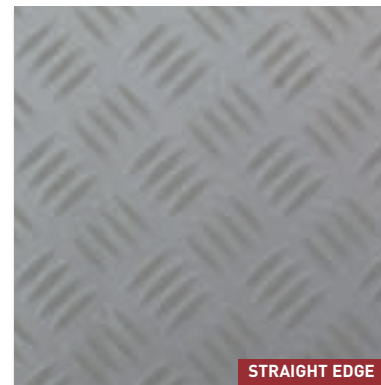

STRAIGHT EDGE

Metallica

Size	Thickness	Code	EAN
45,7 x 30,5 cm	2 mm	4590 0229	3475710238130





O229 - Metallica

## Caractère Trend

### Technical characteristics

Dimensions	EN 427	cm	30.5 x 45.7	30.5 x 60.9 60.9 x 60.9
Total thickness	EN 428	mm	2.0	3.0
Wear-layer thickness	EN 429	mm	0.20	0.30
Surface treatment	-	-	PUR	
Weight	EN 430	g/sqm	3425	5590
Fire classificaton	EN 13501-1	class	Bfl-s1 (B1)	
Residual indentation	EN 433	mm	0.05	
Colour fastness	EN ISO 20 105-B02	-	≥ 6	
Wear group	EN 649	group	T	
Packaging 30.5 x 45.7	-	-	11 tiles = 1.5 sqm	-
Packaging 30.5 x 60.9	-	-	-	11 tiles = 2 sqm
Packaging 60.9 x 60.9	-	-	-	7 tiles = 2.6 sqm
Unit 30.5 x 45.7	-	-	4 packs = 6 sqm	-
Guarantee	-	-	10 years	15 years

### CE MARKING



EN 14041



Areas of use: domestic



2 mm



3 mm



### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

### ENVIRONMENT



- 100% recyclable
- 80% mineral
- Soapy water cleaning



0398 - Day Slate

# Carattere Village

## V Style

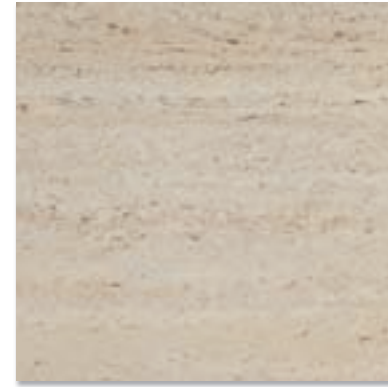


Travertin

Size	Thickness	Code	EAN
45,7 x 30,5 cm	2 mm	4586 0201	3475710247590



Day Slate

Size	Thickness	Code	EAN
45,7 x 30,5 cm	2 mm	4586 0398	3475710265419

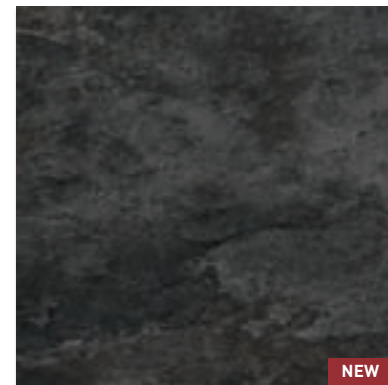

Night Slate

Size	Thickness	Code	EAN
45,7 x 30,5 cm	2 mm	4586 0397	3475710265402






Caractère Village

Technical characteristics			
Dimensions	EN 427	cm	30.5 x 45.7
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.20
Surface treatment	-	-	PUR
Weight	EN 430	g/sqm	3425
Fire classificaton	EN 13501-1	class	B <sub>f1</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.05
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	11 tiles = 1.5 sqm
Unit	-	-	6 sqm
Guarantee	-	-	10 years

CE MARKING



Areas of use: domestic



HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT

- 100% recyclable
- 80% mineral
- Soapy water cleaning

0397 - Night Slate



# Senso Rustic Tiles

## Straight edges - V Style



Cayenne

Size	Thickness	Code	EAN
40.6 x 40.6 cm	3 mm	4595 0242	3475710247453



Coconut

Size	Thickness	Code	EAN
45.7 x 45.7 cm	2 mm	4599 0292	3475710253416



Lodge

Size	Thickness	Code	EAN
40.6 x 40.6 cm	2 mm	3336 0371	3475710250422








## Senso Rustic Tiles

Technical characteristics				
Dimensions	EN 427	cm	45.7 x 45.7 40.6 x 40.6	40.6 x 40.6
Total thickness	EN 428	mm	2.0	3.0
Wear-layer thickness	EN 429	mm	0.20	0.30
Surface treatment	-	-	PUR	
Weight	EN 430	g/sqm	3425	5590
Fire classification	EN 13501-1	class	B <sub>fl</sub> -s1 (B1)	
Residual indentation	EN 433	mm	0.05	
Colour fastness	EN ISO 20 105-B02	-	≥ 6	
Wear group	EN 649	group	T	
Packaging 40.6 x 40.6	-	-	8 tiles = 1.3 sqm	11 tiles = 1.8 sqm
Packaging 45.7 x 45.7	-	-	7 tiles = 1.5 sqm	-
Unit 40.6 x 40.6	-	-	3 packs = 3.9 sqm	No
Guarantee			10 years	15 years

### CE MARKING



### Areas of use: domestic



#### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

#### ENVIRONMENT

- 100% recyclable
- 80% mineral
- Soapy water cleaning




# Dry Back

INSIGHT & ARTLINE


---

- Residential to light commercial
- Traditional installation
- 100% bevelled

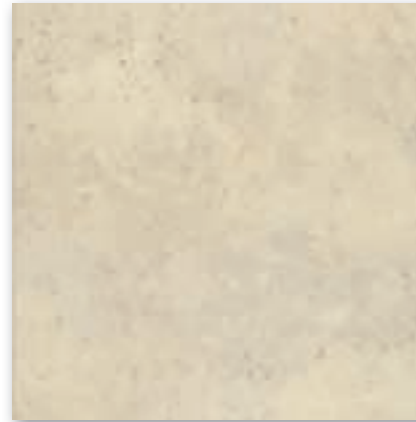


Limestone

Size	Code	EAN
45,7 x 45,7 cm	3163 0435	3475710245978

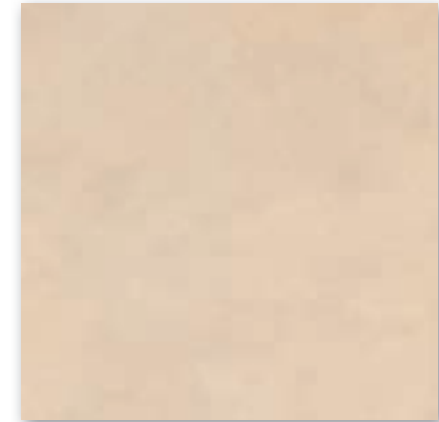


Ventosa

Size	Code	EAN
45,7 x 45,7 cm	3163 0482	3475710245893

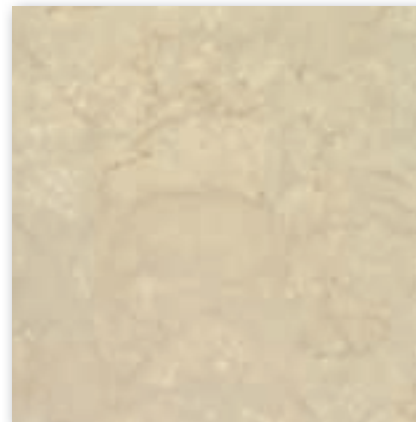

Marble Beige

Size	Code	EAN
45,7 x 45,7 cm	3163 0433	3475710245954

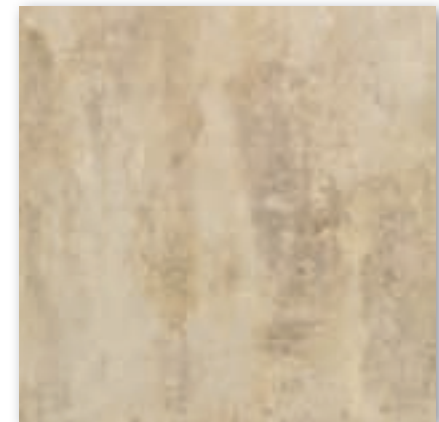



Konya

Size	Code	EAN
45,7 x 45,7 cm	3163 0434	3475710245961

# Insight 2.5 / 0.55


## V Style

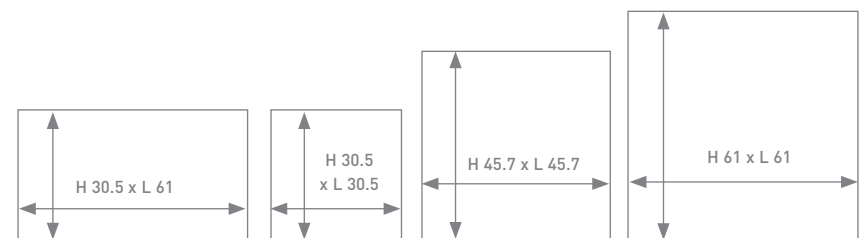

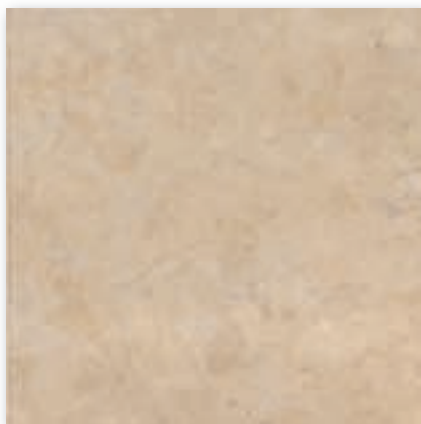


**Verone**

Size	Code	EAN
30,5 x 30,5 cm	3162 0375	3475710245794
45,7 x 45,7	3163 0375	3475710245831

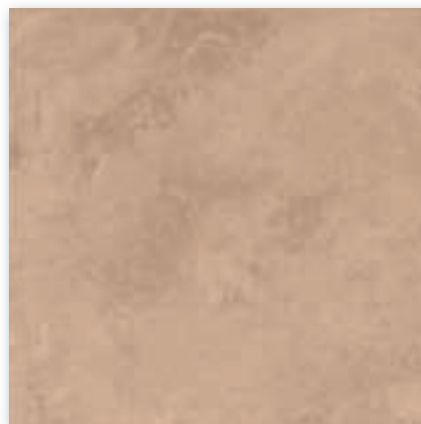


**Alto**

Size	Code	EAN
45,7 x 45,7 cm	3163 0481	3475710245909

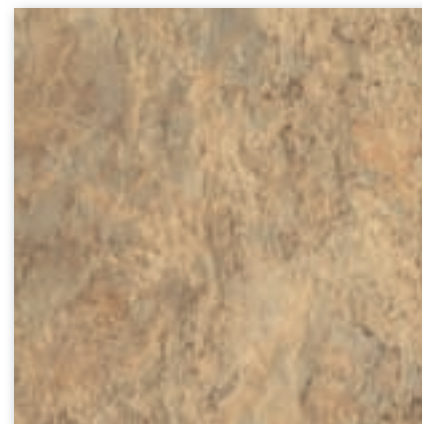

**Irish Slate**

Size	Code	EAN
45,7 x 45,7 cm	3163 0439	3475710246012

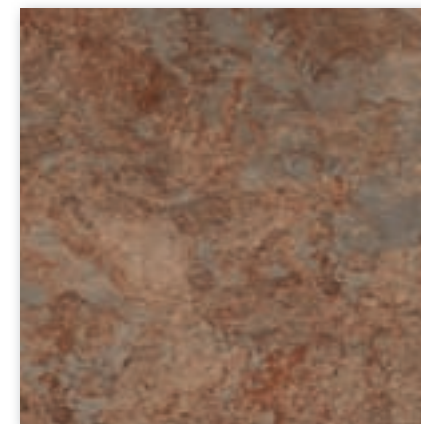

**Garden Stone**

Size	Code	EAN
45,7 x 45,7 cm	3163 0484	3475710245862




**Fargas**

Size	Code	EAN
45,7 x 45,7 cm	3163 0483	3475710245886



**Kensington Beige**

Size	Code	EAN
45,7 x 45,7 cm	3163 0430	3475710245923

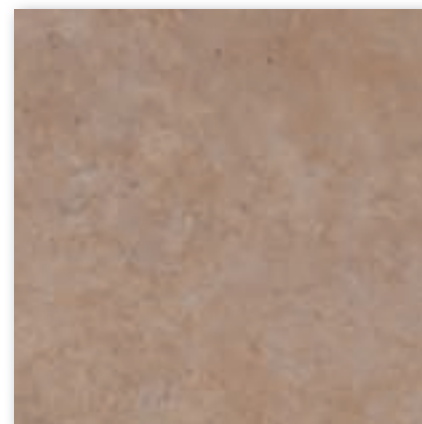


**Cortona**

Size	Code	EAN
30,5 x 30,5 cm	3162 0376	3475710245800
45,7 x 45,7 cm	3163 0376	3475710245879




**Montrose**

Size	Code	EAN
61 x 30,5 cm	3173 0485	3475710245855

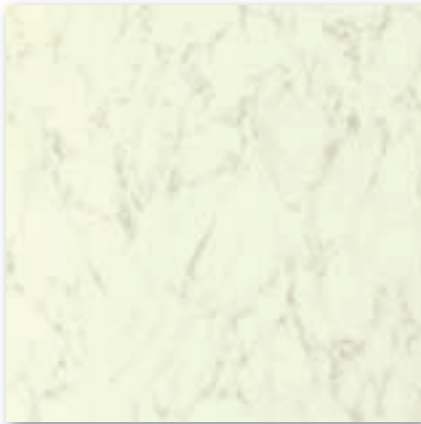


**Marble White**

Size	Code	EAN
30,5 x 30,5 cm	3162 0377	3475710245817

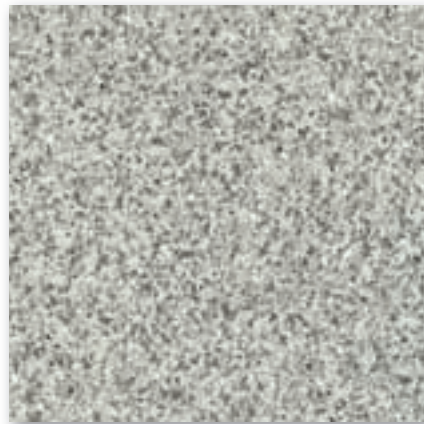

**Granito**

Size	Code	EAN
45,7 x 45,7 cm	3163 0432	3475710245947

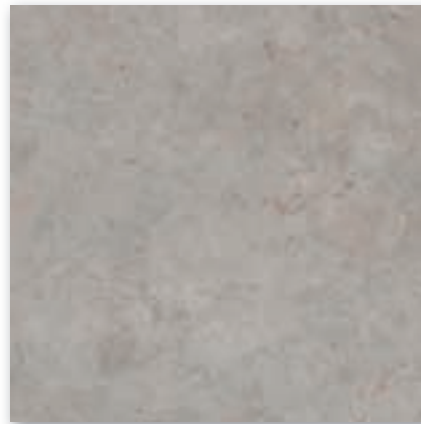

**Galatina**

Size	Code	EAN
45,7 x 45,7 cm	3163 0486	3475710245848



**Riverside**

Size	Code	EAN
45,7 x 45,7 cm	3163 0436	3475710245985



**Romeira**

Size	Code	EAN
45,7 x 45,7 cm	3163 0480	3475710245916



**Kensington Grey**

Size	Code	EAN
45,7 x 45,7 cm	3163 0431	3475710245930



**Sweet Cloud**

Size	Code	EAN
45,7 x 45,7 cm	3163 0437	3475710245992




**Silver city**

Size	Code	EAN
61 x 61 cm	3159 0373	3475710245701




Norwegian Slate

Size	Code	EAN
45,7 x 45,7 cm	3163 0438	3475710246005

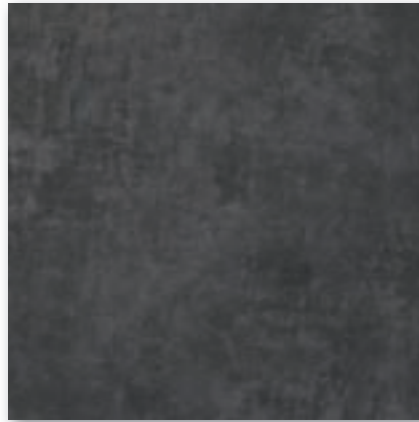


Factory

Size	Code	EAN
61 x 30,5 cm	3173 0487	3475710246029

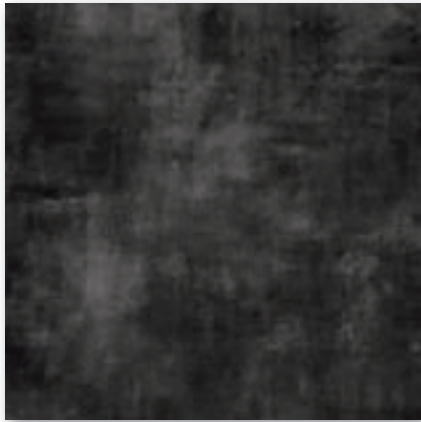


Parker Station

Size	Code	EAN
61 x 61 cm	3159 0374	3475710245718

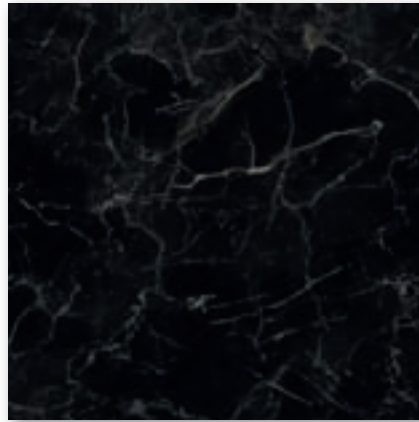

Marble Black

Size	Code	EAN
30,5 x 30,5 cm	3162 0378	3475710245824

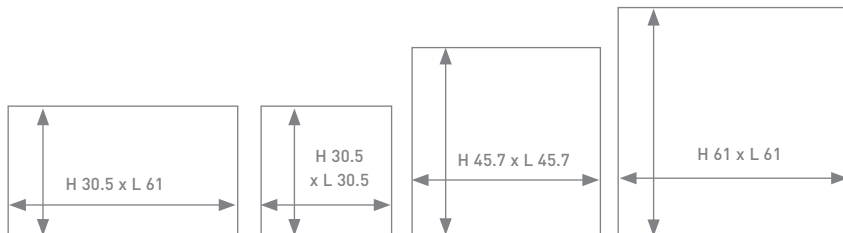

Insight 2.5 / 0.55

**Technical characteristics**

Dimensions	EN 427	cm	45.7 x 45.7 / 30.5 x 61 / 30.5 x 30.5 / 61 x 61
Total thickness	EN 428	mm	2.50
Wear-layer thickness	EN 429	mm	0.55
Weight	EN 430	g/sqm	4410
Fire classificaton	EN 13501-1	class	B <sub>fl</sub> -s1 (B1)
Residual indentation	EN 433	mm	≤ 0.1
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging 30.5 x 30.5	-	-	36 tiles = 3.34 sqm
Packaging 45.7 x 45.7	-	-	16 tiles = 3.34 sqm
Packaging 61 x 61	-	-	9 tiles = 3.34 sqm
Packaging 30.5 x 61	-	-	18 tiles = 3.34 sqm
Guarantee residential use	-	-	15 years
Guarantee commercial use	-	-	5 years

**CE MARKING**

	EN 14041			
--	----------	--	--	--

Areas of use: domestic



**HEALTH**

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

**ENVIRONMENT**

- 100% recyclable
- ISO 14001
- Soapy water cleaning



**NEW**

# Artline 2.0 / 0.3


## V Style

45.7 X 45.7



Arpeggio

Size	Code	EAN
45,7 x 45,7 cm	3178 0468	3475710268120

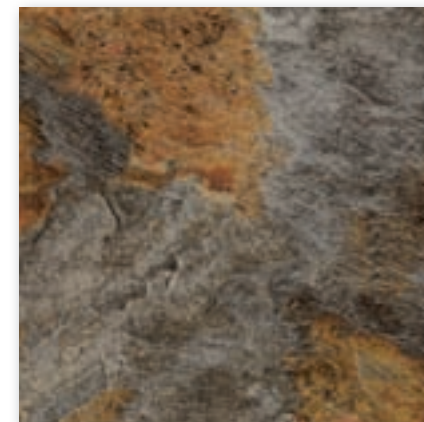


Fuoco

Size	Code	EAN
45,7 x 45,7 cm	3178 0469	3475710268137




Walz

Size	Code	EAN
45,7 x 45,7 cm	3178 0467	3475710268113

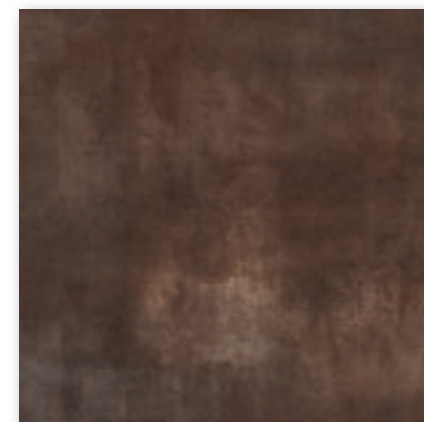

Brio

Size	Code	EAN
45,7 x 45,7 cm	3178 0477	3475710268212








**Chorist**

Size	Code	EAN
45,7 x 45,7 cm	3178 0466	3475710268106




**Maestro**

Size	Code	EAN
45,7 x 45,7 cm	3178 0474	3475710268182

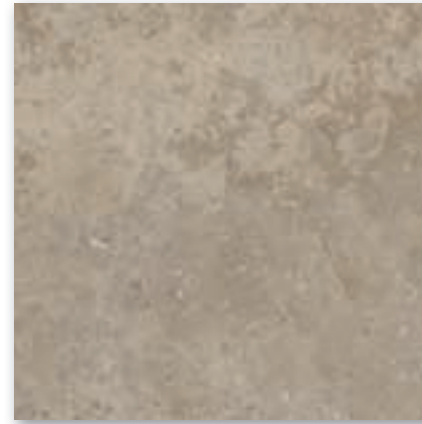


**Moderato**

Size	Code	EAN
45,7 x 45,7 cm	3178 0470	3475710268144

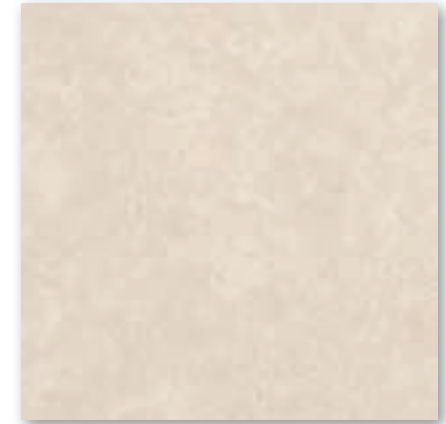

**Rondo**

Size	Code	EAN
45,7 x 45,7 cm	3178 0472	3475710268168

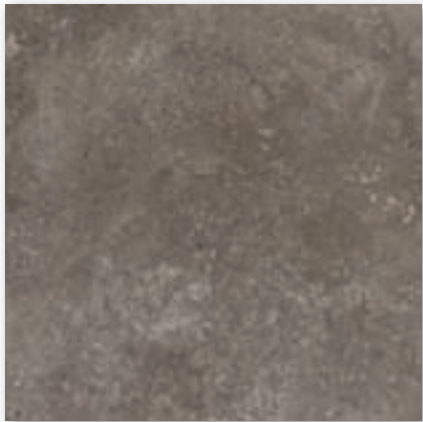


**Vibrato**

Size	Code	EAN
45,7 x 45,7 cm	3178 0471	3475710268151




**Staccato**

Size	Code	EAN
45,7 x 45,7 cm	3178 0476	3475710268205

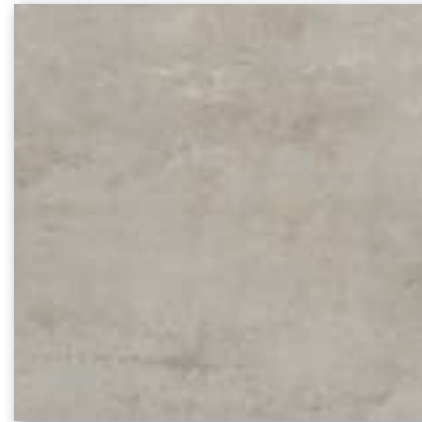

**Bolero**


Size	Code	EAN
45,7 x 45,7 cm	3178 0475	3475710268199

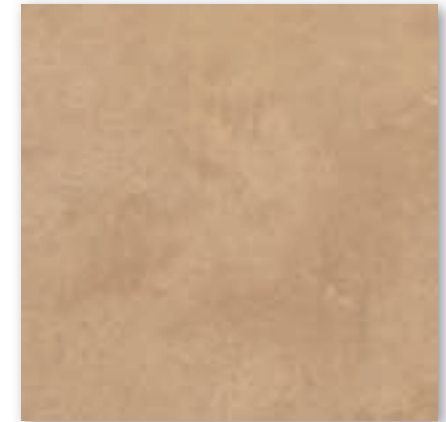

**Crescendo**

Size	Code	EAN
45,7 x 45,7 cm	3178 0478	3475710268229


45.7 X 45.7

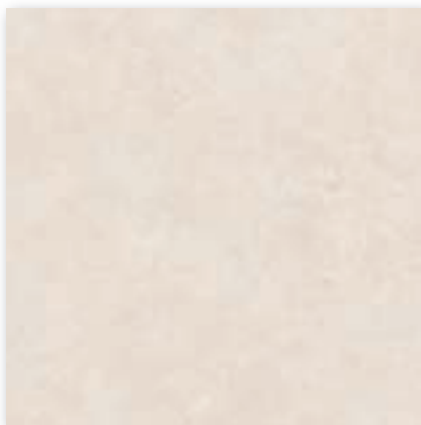

Melody


Size	Code	EAN
45,7 x 45,7 cm	3178 0473	3475710268175

30.5 x 30.5

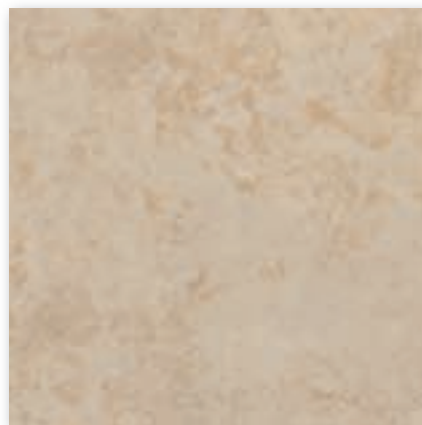

Harmony


Size	Code	EAN
30,5 x 30,5 cm	3180 0344	3475710268243

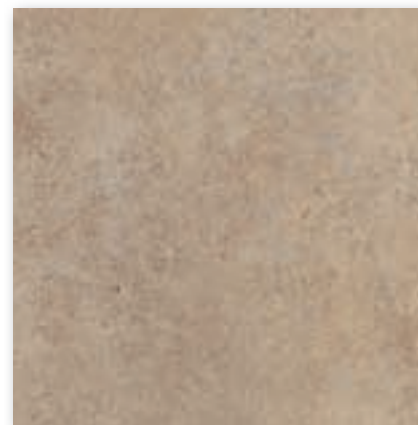

Volupto


Size	Code	EAN
30,5 x 30,5 cm	3180 0346	3475710268267

30.5 X 61

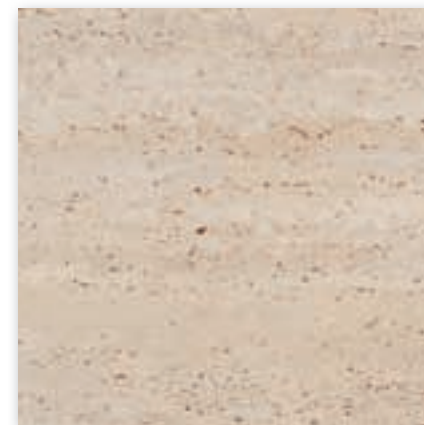

Soprano

Size	Code	EAN
30,5 x 61 cm	3179 0414	3475710268342

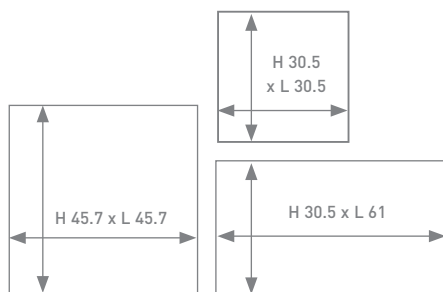


Tenor

Size	Code	EAN
30,5 x 30,5 cm	3180 0402	3475710268274



Allegro

Size	Code	EAN
30,5 x 30,5 cm	3180 0345	3475710268250

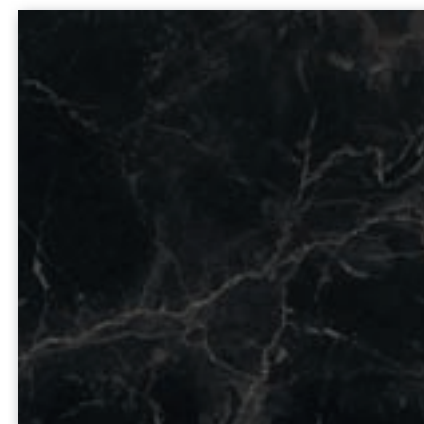

Opera

Size	Code	EAN
30,5 x 61 cm	3179 0343	3475710268335



## Artline 2.0 / 0.3

### Technical characteristics

Dimensions	EN 427	cm	45.7 x 45.7 / 30.5 x 61 / 30.5 x 30.5
Total thickness	EN 428	mm	2.0
Wear-layer thickness	EN 429	mm	0.3
Weight	EN 430	g/sqm	3460
Fire classification	EN 13501-1	class	B <sub>f</sub> -s1 (B1)
Residual indentation	EN 433	mm	≤ 0.1
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging 30.5 x 30.5	-	-	36 tiles = 3.34 sqm
Packaging 45.7 x 45.7	-	-	16 tiles = 3.34 sqm
Packaging 30.5 x 61	-	-	18 tiles = 3.34 sqm

### CE MARKING

	EN 14041		
--	----------	--	--

Areas of use: domestic



#### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

#### ENVIRONMENT

- 100% recyclable
- ISO 14001
- Soapy water cleaning



# Table of contents

## Vinyl Tiles ranges

Pop	230
Design	232
Aqua	234
Textile	236
Prime	238
Laying and maintenance	240



0286 - Straw

# ■ VINYL TILES



- Decorative
- Self Adhesive
- Slim

TEXTILE

DESIGN

POP

AQUA

PRIME



## 5 WAYS TO SATISFY YOUR CUSTOMER'S DESIRES!

Economical, sturdy and easy to install... Since 1985, consumers have made the smart decision and chosen the brand that invented the self-adhesive vinyl tile. In terms of both quality and selection, Gerflor continues to innovate with a new POP style with featuring exclusive embossing.



## ORIGINAL QUALITY



Guaranteed to be free from environmentally noxious agents such as lead or formaldehyde



Exclusive underlay for long-lasting dimensional stability



100% recyclable

## EASY & ECONOMICAL



Suitable for any room in the house, including bathrooms and washrooms



No glue required – only a cutter. Now tile laying is child's play



Easily cleaned using soapy water

# Self adhesive

Fashion: We stick to the trends!



0400 - Pop Orange


**NEW**

# Pop 1.5



Pop White

Size	Code	EAN
30,5 x 30,5 cm	3224 0402	3475710265389

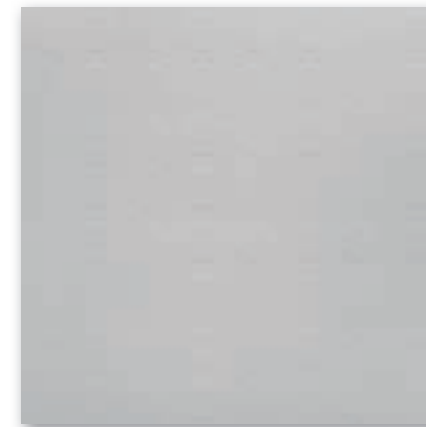

Pop Grey

Size	Code	EAN
30,5 x 30,5 cm	3224 0403	3475710265396




Pop Orange

Size	Code	EAN
30,5 x 30,5 cm	3224 0400	3475710265365




Pop Kiwi

Size	Code	EAN
30,5 x 30,5 cm	3224 0401	3475710265372





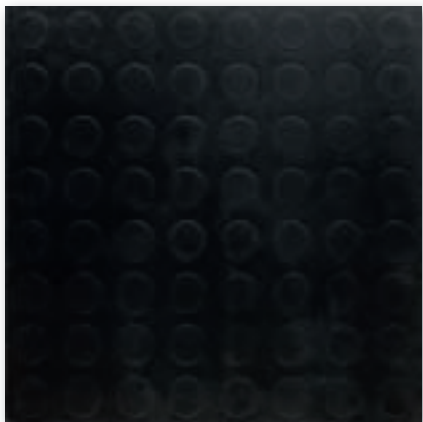

Pop Black

Size	Code	EAN
30,5 x 30,5 cm	3224 0418	3475710266027



Pop Blue

Size	Code	EAN
30,5 x 30,5 cm	3224 0417	3475710266010



## Pop 1.5

Technical characteristics			
Dimensions	EN 427	cm	30,5 x 30,5
Total thickness	EN 428	mm	1.50
Wear-layer thickness	EN 429	mm	0.08
Weight	EN 430	g/sqm	2550
Fire classification	EN 13501-1	class	B <sub>fl</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.04
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	11 tiles = 1 sqm
Unit	-	-	5 packs = 5 sqm

### CE MARKING

	EN 14041			
--	----------	--	--	--

Areas of use: domestic



### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission


### ENVIRONMENT

- 100% recyclable
- Soapy water cleaning




O220 - Slate Anthracite

# Design 1.5

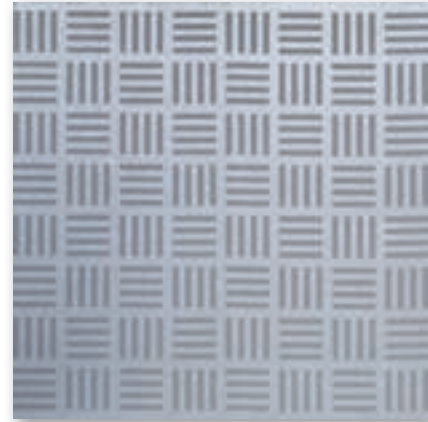


Neptune Gris

Size	Code	EAN
30,5 x 30,5 cm	3237 0562	3475710104664

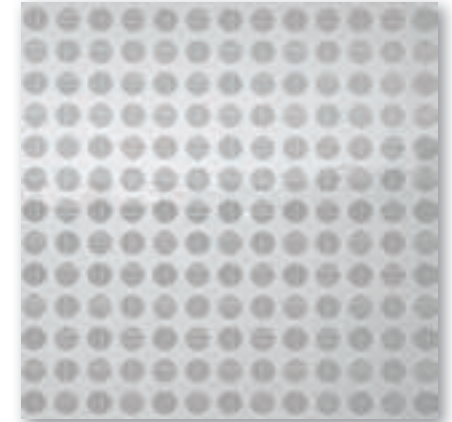

Disco

Size	Code	EAN
30,5 x 30,5 cm	3237 0223	3475710217821

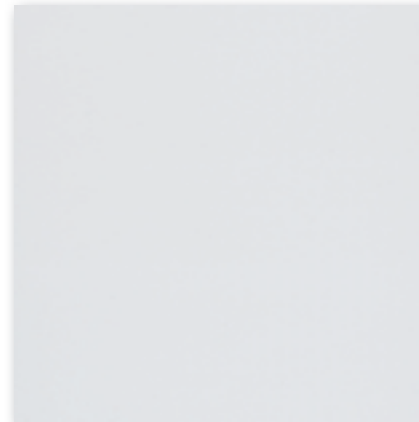


White Tile


Size	Code	EAN
30,5 x 30,5 cm	3237 0224	3475710186844



Alu


Size	Code	EAN
30,5 x 30,5 cm	3237 0222	3475710217814



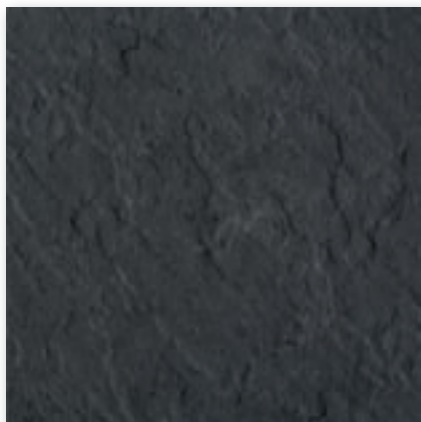


Slate Anthracite

Size	Code	EAN
30,5 x 30,5 cm	3237 0220	3475710186820

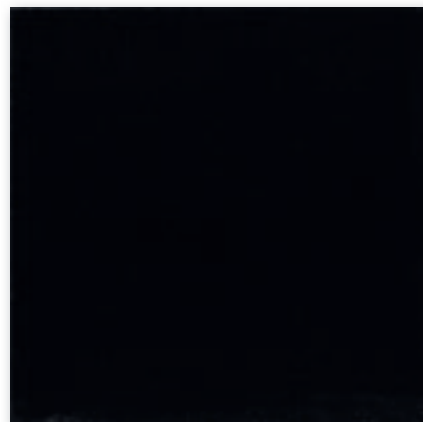

Black Tile

Size	Code	EAN
30,5 x 30,5 cm	3237 0221	3475710186837

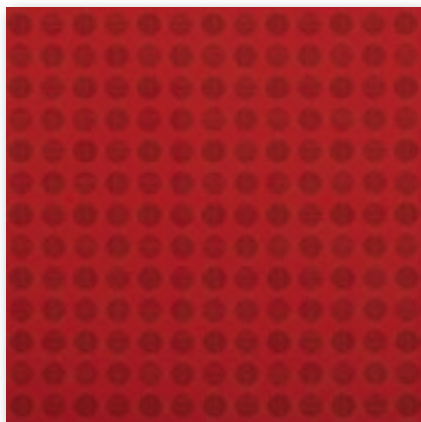

Disco Red

Size	Code	EAN
30,5 x 30,5 cm	3237 0249	3475710247040



Graphic Black


Size	Code	EAN
30,5 x 30,5 cm	3237 0250	3475710247057

## Design 1.5

### Technical characteristics

Dimensions	EN 427	cm	30.5 x 30.5
Total thickness	EN 428	mm	1.50
Wear-layer thickness	EN 429	mm	0.08
Weight	EN 430	g/sqm	2550
Fire classificaton	EN 13501-1	class	B <sub>f1</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.04
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	11 tiles = 1 sqm
Unit	-	-	5 packs = 5 sqm

### CE MARKING



Areas of use: domestic



#### HEALTH


- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

#### ENVIRONMENT

- 100% recyclable
- Soapy water cleaning




# Aqua 1.5

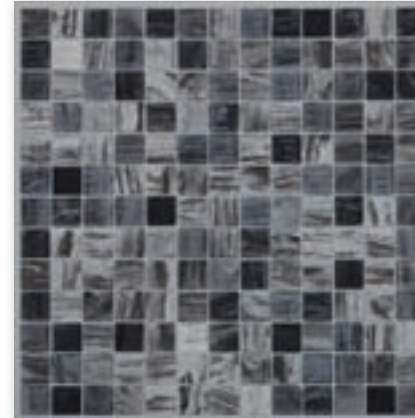


**Pearl**

Size	Code	EAN
30,5 x 30,5 cm	3273 0244	3475710247002

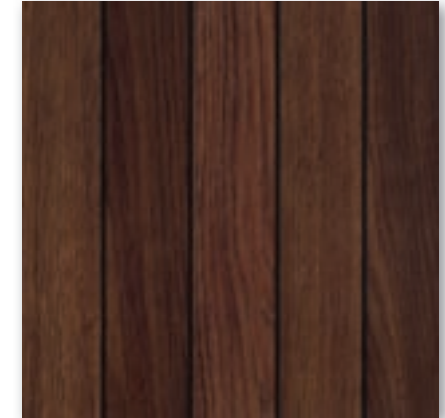

**Boat**

Size	Code	EAN
30,5 x 30,5 cm	3273 0229	3475710183904

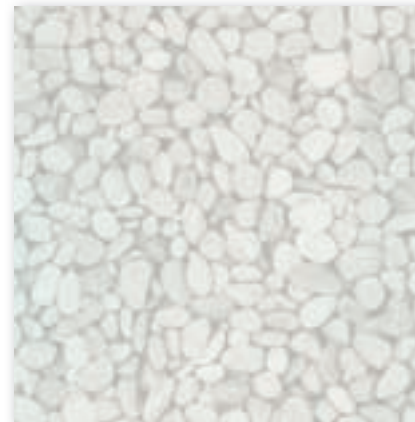


**Fujiyama**

Size	Code	EAN
30,5 x 30,5 cm	3273 0247	3475710247026



**Osaka**

Size	Code	EAN
30,5 x 30,5 cm	3273 0248	3475710247033





0244 - Pearl

## Aqua 1.5

### Technical characteristics

Dimensions	EN 427	cm	30,5 x 30,5
Total thickness	EN 428	mm	1.50
Wear-layer thickness	EN 429	mm	0.08
Weight	EN 430	g/sqm	2550
Fire classificaton	EN 13501-1	class	B <sub>fl</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.04
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	11 tiles = 1 sqm
Unit	-	-	5 packs = 5 sqm

### CE MARKING

	EN 14041			
--	----------	--	--	--

Areas of use: domestic



#### HEALTH


- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

#### ENVIRONMENT

- 100% recyclable
- Soapy water cleaning



0286 - Straw

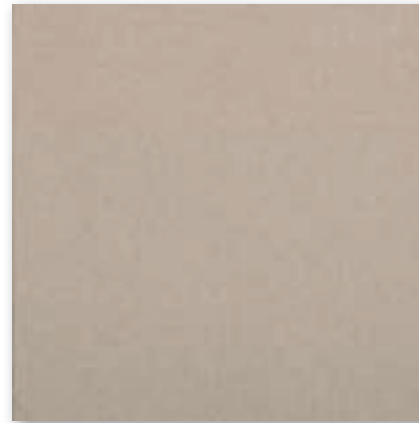

Coton

Size	Code	EAN
40,6 x 40,6 cm	3215 0291	3475710247842




Straw

Size	Code	EAN
40,6 x 40,6 cm	3215 0286	3475710247798



Graphite

Size	Code	EAN
40,6 x 40,6 cm	3215 0287	3475710247804





# Textile 1.5



## Textile 1.5

Technical characteristics			
Dimensions	EN 427	cm	40.6 x 40.6
Total thickness	EN 428	mm	1.50
Wear-layer thickness	EN 429	mm	0.08
Weight	EN 430	g/sqm	2550
Fire classification	EN 13501-1	class	B <sub>f1</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.04
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	10 tiles = 1.6 sqm
Unit	-	-	3 packs = 4.8 sqm

### CE MARKING

CE	EN 14041	  
----	----------	---

Areas of use: domestic



#### HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

#### ENVIRONMENT

- 100% recyclable
- Soapy water cleaning

O291 - Coton




0130 - Granite Grey




Granite Grey

Size	Code	EAN
30,5 x 30,5 cm	4556 0130	3475710099380

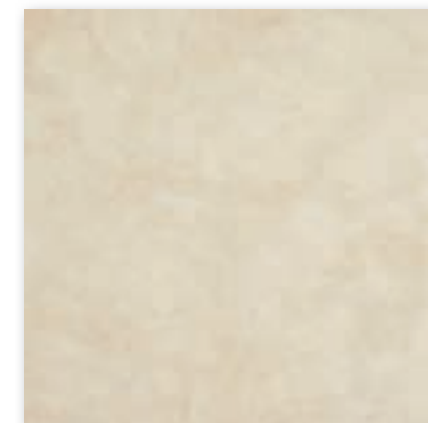


Marble Beige

Size	Code	EAN
30,5 x 30,5 cm	4556 0135	3475710099410

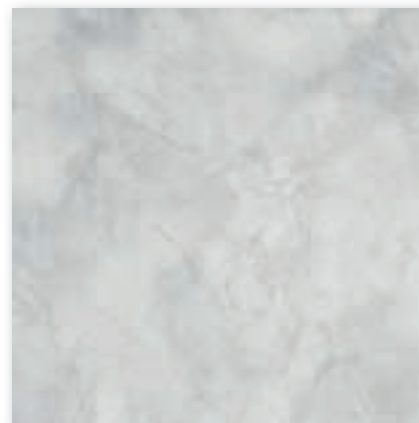


Novara Blanc

Size	Code	EAN
30,5 x 30,5 cm	4556 0781	3475710128516

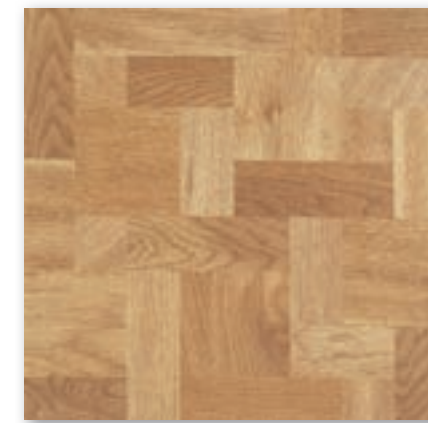


Wood Clear

Size	Code	EAN
30,5 x 30,5 cm	4556 0139	3475710099434



# Prime 1.2



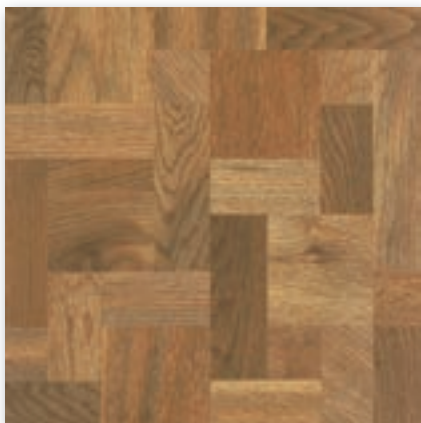

Wood Medium

Size	Code	EAN
30,5 x 30,5 cm	4556 0140	3475710099441



Mosaïque Clair

Size	Code	EAN
30,5 x 30,5 cm	4556 0241	3475710220807



O140 - Wood Medium

Prime 1.2

Technical characteristics

Dimensions	EN 427	cm	30.5 x 30.5
Total thickness	EN 428	mm	1.20
Wear-layer thickness	EN 429	mm	0.08
Weight	EN 430	g/sqm	2190
Fire classificaton	EN 13501-1	class	B <sub>fl</sub> -s1 (B1)
Residual indentation	EN 433	mm	0.04
Colour fastness	EN ISO 20 105-B02	-	≥ 6
Wear group	EN 649	group	T
Packaging	-	-	11 tiles = 1 sqm
Unit	-	-	5 packs = 5 sqm

CE MARKING

	EN 14041		
--	----------	--	--

Areas of use: domestic



HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT

- 100% recyclable
- Soapy water cleaning

# Self adhesive Laying


✔ SUITABLE SUBFLOORS	Smooth, clean, dry cement and joint free tiles	Can be laid directly. Gerflor Primer recommended.
	Irregular cement or timber flooring, tiling	Only possible after applying fibre-reinforced smoothing compound, sanding and applying Gerflor Primer
	Carpet, vinyl flooring laminated parquet	Can be laid after removal of previous flooring and backing, followed by grouting, sanding and application of Gerflor Primer
✘ UNSUITABLE SUBFLOORS	Floors with underfloor heating (T° > 28°C) and/or cooling When temperatures can drop to below 15°C Verandas	
	OSB panels	
	Cracked floors or with rising damp	

**IMPORTANT :** Product reserved exclusively for residential use. Gerflor does not recommend using backing. Refer to fitting instructions inside.


The tiles and planks must be laid on a hard, dry, clean, dust-free, perfectly smooth subfloor. gerflor does not recommend the use of underlayments.

Type of subfloor	Preparation of subfloor
Concrete floor	If necessary, use smoothing compound to get rid of any remaining irregularities. Sand and vacuum carefully. Apply Gerflor primer.
Flexible floor covering (PVC, carpet, etc.) and laminated floor boards	Remove the old floor covering and any underlayment; scrape well to obtain a smooth, clean, dry subfloor. If necessary, use smoothing compound to get rid of any remaining irregularities. Sand and vacuum carefully. Apply Gerflor primer.
Solid timber flooring and wood-based panels	Nail down any loose planks. To obtain a perfectly smooth floor, use a fibre-reinforced smoothing compound or lay particle board over the entire surface. Tongue and groove panels must be glued and screwed down every 15 to 30 cm depending on the support using stainless steel (or similar) screws whose length is 2.5 times the thickness of the panels. Fill joints with an appropriate sealant, sand down, vacuum and apply Gerflor primer. The dimensional variations inherent to this type of subfloor (due to variations in the relative humidity and/or temperature) can cause movements in the subfloor that can widen the natural gaps between tiles and planks.
Tiling	Glue back any loose or missing tiles. Clean and remove dust. Remove any traces of paint, plaster, grease, etc. Apply smoothing compound to fill the joints and get rid of other irregularities. Sand and smooth. Apply Gerflor primer.
Free-flowing screeds	Sand off any grout, vacuum carefully and apply Gerflor primer.


## Tiles & Planks

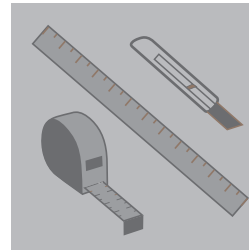


**1** You will need a ruler, a cutter and a tape measure.

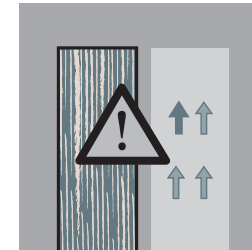


**3<sup>B</sup>** Lay the tiles and planks in the direction indicated on the back.




**2** Begin in the middle of the room.

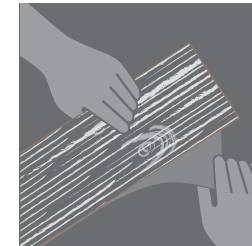

**4** Remove the paper backing.



**3<sup>A</sup>** Always lay the black decking strip on the same side.

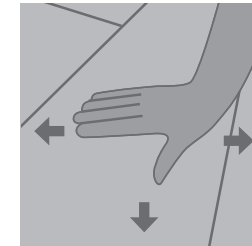


**5** Stick to the floor and press to expel air.




**TECHNICAL TIP:**  
Apply Gerflor Primer to your floor to improve product adherence (see accessories p 246)




# Senso Clic Laying




**1** Check that all the planks have the same batch number.




**2** Unwrap planks and stack them flat, decorative side up, 24 hours prior to installation and at roughly 20°C.




**3** Equip yourself with a ruler, knife, cut-resistant gloves, tape measure and rubber mallet (do not use a metal hammer).




**4** Start in one corner of the room.




**5** With the visible tongue always turned toward you, lay each row of flooring while moving backward. The last row of planks should be the same width as the first row of planks.




**6** Match up the tongue with the groove.




**7** Hammer the planks together, beginning with the small side. Hammer taps must be close to one another to ensure that planks are firmly locked together.



**8** Offset each row by a third of a plank's length.



**9** The strip at the edge of each row should not be less than 25 cm long and 8 cm wide.




**10** Allow a 5 mm expansion gap between the planks and the walls.




**RUBBER MALLET**  
(see accessories p 247)


# Senso Lock Laying

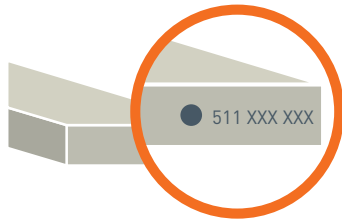


- 1 Check that all boxes bear the same batch number.

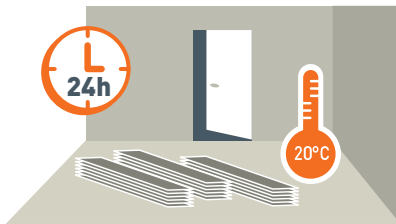


- 2 Unwrap planks and stack them flat, decorative side up, 24 hours prior to installation and at roughly 20°C.

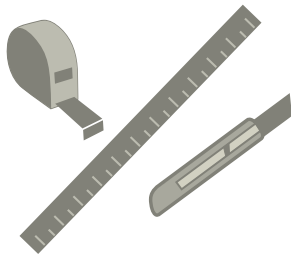


- 3 Make sure you have a ruler, cutter, cut-resistant gloves and a tape measure handy.

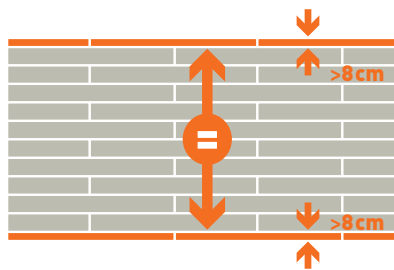


- 4 Measure the room to even out the width (8 cm min.) of the first and last rows.

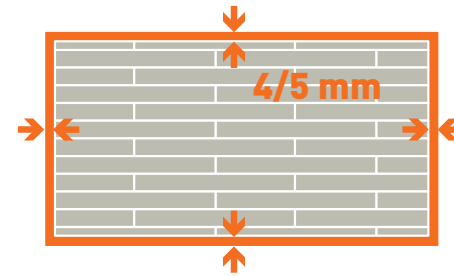


- 5 Leave 4 to 5 mm between the planks and the walls enclosing the room.

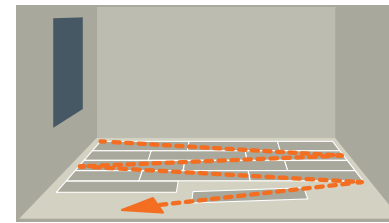

- 6 Begin laying the planks along one of the walls, starting from the left corner of the room.

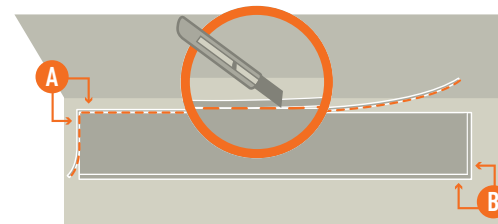


- 7 The tongue (male) side facing the wall must be cut **A**. The grooves (female side) must always be visible **B**.

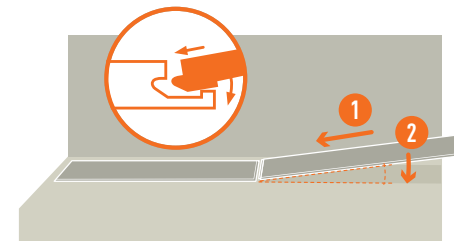


- 8 Lay the next plank at a slight angle to insert the tongue into the groove of the previous plank.


# Dry Back Laying

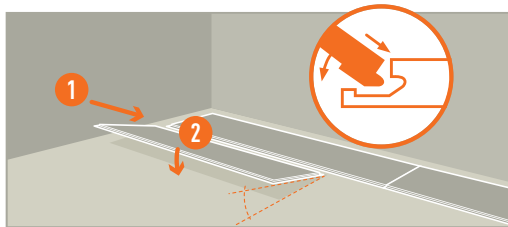

- 9** To assemble the first plank of the next row, place it at an angle to insert the tongue of the long side into the grooves of the planks in the first row.

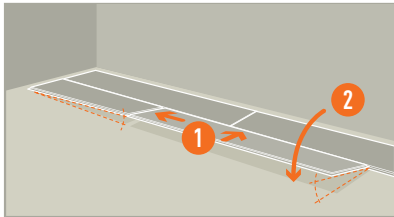

- 10** For subsequent planks, assemble the short side then the long side, keeping the plank at an angle.

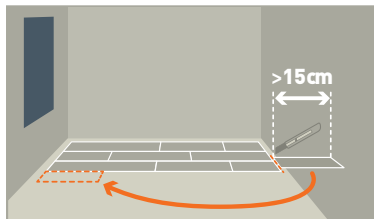

- 11** Use strips of more than 15 cm to begin subsequent rows.

## Tiles & Planks

### LAYING ADVICE

Planks can be laid on most subfloors. The subfloor must be clean, even, hard, smooth and dry for good quality laying. If the floor is uneven, apply a suitable levelling plaster coat to the subfloor allowed by Gerflor prime.

- Use a professional-quality craft knife to cut the planks.
- Use an acrylic emulsion adhesive applied with a finely-notched trowel such as a standard A 2 TKB (300 – 350g/sq. m).
- Follow the adhesive supplier's instructions to the letter and respect gumming times.
- Stick down using a wedge or roller-press.

### CARE AND MAINTENANCE

- Do not walk on the floor for 24 hours after laying.
- Arrange or install furniture 48 hours after laying.
- Do not use rubber leg caps on furniture.

### IN THE HOME

- Use a broom or vacuum cleaner.
- Wash with a conventional detergent one or more times a week, using a broom and a floor cloth.

### IN BUILDINGS (shops, offices, etc.)

Daily cleaning by hand

- Sweep using a broom or soaked mop to collect the dirt that is not stuck down.
- Wash the floor using a wrung-out mop
- Remove black scuff marks (from shoes) using specific detergent products. Monthly machine cleaning or every three months depending on circulation with a floor scrubber, rotocleaner or multi-function cleaning machine, then vacuum to remove water
- Use a neutral or alkaline detergent.
- Red disc for floor scrubbers and cleaning

# Maintenance

## Precautions to be taken:

- Place plastic or felt pads under the legs of furniture and heavy objects.
- Protect the tiles/planks from sources of heat and splashing.
- When there are large panes of glass or skylights, you will need to protect the floor from direct sunlight.

## Cleaning:

- Use a vacuum cleaner or damp mop.
- Use traditional non-abrasive detergent.
- Heavy stains: Diluted bleach, white spirits, methylated spirits and lemon juice.
- Stubborn stains - ink, tomato, mustard, blood, beetroot, mercurochrome: Apply diluted bleach for a few minutes without rubbing. Rinse thoroughly.
- Rust: Clean with a textile rust remover and rinse thoroughly.
- Grease, biro pen, felt pen: Rub lightly with a rag soaked in white spirits.
- Rinse thoroughly.

## Cleaning instructions:

- Acetone and chlorinated solvents such as trichlorethylene must not be used.
- Do not use wax or glazing varnish.
- If any adhesive oozes out, remove it with a rag soaked in white spirits.

## Replacing tiles/planks:

- Cut the tile/plank into several pieces using a utility knife.
- Heat the tile/plank with a hair dryer to make it more flexible.
- Then remove the pieces starting in the middle so as not to damage the edges.
- The tile/plank can then be replaced.

## Additional information:

Gaps between tiles/planks naturally increase as they get older and do not require repair.

### WARRANTY

Gerflor self-adhesive floor tiles/planks are warranted against all defects from the date of purchase. Complaints must be addressed to the place of purchase together with the corresponding sales receipt. The warranty is no longer valid if underlayment is used.

The warranty covers all abnormal wear of the product; self-adhesive tiles/planks must be used exclusively in private homes to the exclusion of professional premises and must be installed and maintained according to the manufacturer's instructions.

The warranty covers the replacement (excluding installation and removal costs) of tiles/planks recognised as defective, by tiles/planks of the same or similar quality in the existing product range on the date on which the claim is made. It does not cover normal wear of tiles/planks, incorrect installation and maintenance, abusive or abnormal use, scratches, damage or negligence caused by the user, including impacts, falling objects, stains, cigarette and other burns and any damaged caused by inclement weather or fire. This warranty is subject to the application of national legislation on warranties to be provided by the manufacturers of this type of project.

# Flooring Accessories



## Summary

**Preparation: Primer & Adhesives** 246

**Installation: Mallet & Cold welding** 247

**Decoration: Skirting boards** 248-249

**Maintenance: Cleaner & Polish** 249

# Flooring Preparation

Ranges

## PRIMER PERFORMANCE



SELF ADHESIVE LVT

## FAST TACK VINYL FLOOR ADHESIVE

AVAILABLE MARCH 2012



DRY BACK LVT  
VINYL BACKING ROLLS

## HIGH TEMPERATURE GRADE VINYL ADHESIVE

AVAILABLE MARCH 2012



DRY BACK LVT  
VINYL BACKING ROLLS

Features

- Coverage : approx 8m<sup>2</sup> / Kg
- Recommended tool : roll
- Storage : 10-25°C
- Shelf life: 12 months in unopened containers stored under good conditions

- Suitable for use over normal underfloor heating installations
- Consistency: creamy
- Coverage approx: 25m<sup>2</sup> with 5L
- Recommended tool : 5-6mm trowel
- Storage: Store between 5°C and 30°C. Protect from frost.
- Shelf life: 12 months in unopened containers stored under good conditions

- High resistance to both heat and PVC plasticisers.
- Suitable for use in conservatories and areas where floor to ceiling windows are installed.
- Suitable for use over normal underfloor heating installations.
- Consistency: Viscous liquid
- Open time approx : 30 minutes
- Coverage approx: 20m<sup>2</sup> with 5L
- Recommended tool : 5-6mm trowel
- Storage: Store between 5°C and 30°C. Protect from frost.
- Shelf life: 12 months in unopened containers stored under good conditions

Benefits

- Effective lasting adhesion to all Gerflor self adhesive products
- Regulates porosity, improves tiles & planks adhesion, neutralises dust & grease
- Easy to use : roller application
- Odourless : no solvents

- High bond strength
- Excellent initial tack : flooring can be used just after laying
- Quick drying time (until the glue becomes transparent) : 40 mn
- Odourless : no solvents
- Excellent resistance to plasticisers migration. Non-staining

- High resistance to heat
- Designed to resist to significant temperature variations. Suitable for use in conservatories, areas with floor to ceiling windows directly exposed to sunlight
- Quick drying time : 30 mn (can be reduced at higher temperature)
- Odourless : solvent-free
- High resistance to heat.
- Solvent-free.
- Excellent grip.

Packaging

Product code per unit	Gencod per unit	Per Carton
1kg - 0572 001	1kg - 3475710223839	1kg - 6 units
3kg - 0571 001	3kg - 3475710216718	3kg - 4 units

Product code per unit	Gencod per unit
5L - 0573 0001	5L - 3475710269028

Product code per unit	Gencod per unit
5L - 0593 0001	5L - 3475710269011



# Laying Flooring

Ranges

## RUBBER MALLET



SENSO CLIC




Weight : 1,5 LB / 880g  
Color : Green

## COLD WELDING SG 916



TEXTILE BACKING ROLLS  
VINYL BACKING ROLLS

In tube - code 0518




The product is inserted by dry joint between the floor coverings to ensure the weld (SG 916)

Benefits

- Ideal to make sure Gerflor clic system products are perfectly locked together.
- Shock absorbing / Anti bouncing system in head : no energy loss
- No scuffing on vinyl surfaces



- Excellent finish with no visible joint line
- Colour-free : may be used with materials of any colour
- Quick to use : no special equipment needed

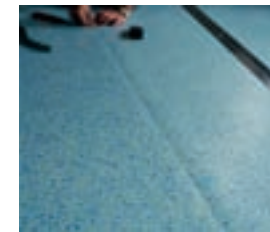

Packaging

Product code per unit

Mallet - 0606 0001

Gencod per unit

Mallet - 3475710265488

Per Carton

6 units

Product code per unit

05060001

Tube of cold welding  
(44 g) - 0506

Gencod per unit

3475710269561

Per Carton

Box of 6 tubes of 44 g

Accessories

# Flooring Decoration


**NEW: COMPOSIT SKIRTING BOARD / READY TO MATCH WITH YOUR FLOORING**

ALL LVT & ROLLS ≤ 3mm THICKNESS

## Innovative

**Composite** materials 55% PVC & 45% Wood

- **Rotproof**
- Perfectly **linear**
- Water **resistant**
- VOC-free, 100% **recycled**
- **Denser** than MDF

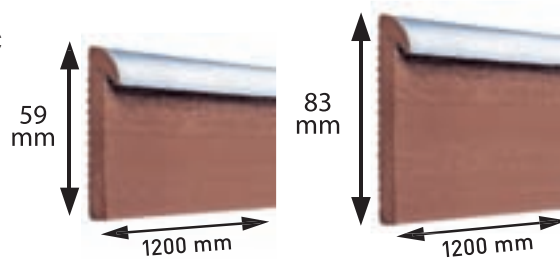

## Must

Adapts to all vinyl flooring less than 3 mm thick:

- Adhesive Tiles & Planks
- Tiles & Planks for glueing
- GFT textile-backed rolls



## Decorative

The **IDEM** skirting system **adapts** to any style, offering **2 heights** (59 and 83cm) and 2 colours (paintable white or aluminium grey) to give you the choice between contrasting and tone-on-tone colour schemes.

**The IDEM system guarantees a perfect match.**



1

2

3

4

5

## Effortless

- No measurements required
- Can be pasted on the wall using standard glue

## Suitable for all Gerflor products except for:

**Rolls :** Home Comfort  
Texline & Hitex HQR

**LVT :** Senso Clic  
Senso Lock

Product code per unit		Gencod per unit	Packaging
<b>IDEM 59 mm</b> Paintable White	0484 0622	3475710256875	20 skirtings x 1,20 linear meters = 24 linear meters / pack
<b>IDEM 59 mm</b> Aluminium Grey	0484 0660	3475710256882	
<b>IDEM 83 mm</b> Paintable White	0485 0622	3475710256899	
<b>IDEM 83 mm</b> Aluminium Grey	0485 0660	3475710256905	

# Flooring Decoration


# Flooring Maintenance & Care

Ranges

## FLEXIBLE SKIRTING

## SEMI-RIGID SKIRTING

ALL LVT & ROLLS




FLEXIBLE SIT ON

PVC skirting

- To be placed on the covering

0474




Semi-rigid PVC skirting to be placed on the wall

0483 - 0482 - 0477

Colors




Available in 60 mm and 80 mm




Available in 60 mm, 80 mm and 100 mm



- Floor/wall junction of rooms and corridors
- Can be used on non-flat walls
- Easy to install



- Solid colour
- Resistant to cleaning waters
- Stylish, wood design

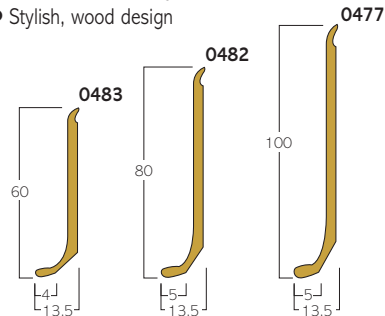

Benefits

Packaging: 1 roll (50 lm)

0483: 25 lengths (3 lm)  
0482: 32 lengths (3 lm)  
0477: 25 lengths (3 lm)

Packaging

Ranges

## POWER CLEANER

## RENOVATOR POLISH

ALL LVT & ROLLS



Features

- Recommended tool: mop
- Use either pure for stripping or diluted for cleaning
- Suitable for all vinyl floorings
- Ideal for domestic use

- For the initial protection of newly-laid/ thoroughly cleaned floors and subsequent routine cleaning.
- Creates an anti-slip satin film of protection
- Repairs fine scratches and shoe marks
- Ideal for domestic use.
- Amount needed for initial protection: 1L = 20m<sup>2</sup> per coat
- Amount needed for routine cleaning: 1L = 1000m<sup>2</sup> (dilution rate: 50ml/10L of water)
- Storage: Store in a cool, dry place in its closed original container

Benefits

- 2-in-1 product:
  - Strips remaining adhesives (when used pure)
  - For daily cleaning of dirt, fat, grease & shoe marks (when diluted)

- Initial protection, regular refreshing & new care treatment
- Protective finish, routine cleaning and high-speed-repair

Packaging

Product code per unit	Gencod per unit	Per Carton
0601 0001	3475710261664	6 units of 0,75L

Product code per unit	Gencod per unit	Per Carton
0603 0001	3475710261695	5 units of 1L

Accessories

# Notes



A large gray rectangular area with horizontal lines, intended for writing notes.

**AUSTRALIA/NEW ZEALAND:** Gerflor Australasia Pty. Ltd  
Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119  
e-mail: gerflor@gerflor.com.au

**AUSTRIA/SWITZERLAND:** Gerflor GmbH  
Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218  
e-mail: austria@gerflor.com - switzerland@gerflor.com

**BELGIUM/LUXEMBURG:** Gerflor Benelux BV  
Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14  
e-mail: gerflorbelgium@gerflor.com

**CANADA:** Gerflor International  
Tel: + 1 438 333 0752 - Fax: + 1 438 380 5425  
e-mail: gerflorcanada@gerflor.com

**FINLAND:** Gerflor Oy  
Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152  
e-mail: info@gerflor.fi

**FRANCE:** Gerflor  
Tel: 00 33 4 75 50 68 68 - Fax: 00 33 4 75 50 69 95  
e-mail: serviceconsol@gerflor.com

**GERMANY:** Gerflor Mipolam GmbH  
Tel: +49 (0)22 41-25 30 444 - Fax: +49 (0)22 41-25 30 100  
e-mail: kundenservice@gerflor.com

**ITALY:** Gerflor S.p.A.  
Tel: +39 02 90 78 60 12 r.a. - Fax: +39 02 90 42 74 84  
e-mail: gerfloritalia@gerflor.com

**LATIN AMERICA (Brazil):** Gerflor América Latina  
Tel: +55 11 38 48 20 20 - Fax: +55 11 38 48 20 23  
e-mail: gerflor@gerflor.com.br

**MIDDLE EAST:** Gerflor Middle East  
Tel: +966 3 847 1779 - Fax: +966 3 847 1781  
e-mail: gerflorME@gerflor.com

**NETHERLANDS:** Gerflor Benelux BV  
Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89  
e-mail: gerflornl@gerflor.com

**POLAND:** Gerflor Polska Sp z o.o  
Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33  
e-mail: info@gerflor.pl

**PORTUGAL:** Gerflor Iberia, SA  
Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44  
e-mail: gerflorportugal@gerflor.com

**RUSSIA:** Gerflor Moscow Office  
Tel: + 7 495 430-86-54 / 65 - Fax: + 7 495 430-85-46  
e-mail: gerflorrus@mspk.east.ru

**SCANDINAVIA:** Gerflor Scandinavia  
Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80  
e-mail: gerflorscand@gerflor.no

**SPAIN:** Gerflor Iberia, SA  
Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85  
e-mail: gerfloriberia@gerflor.com


**UNITED KINGDOM & IRELAND:** Gerflor Ltd  
Tel: +44 (0)1926 622 600 - Fax: + 44 (0) 1926 622 616  
e-mail: contractuk@gerflor.com

**USA:** Gerflor USA  
Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753  
e-mail: info@gerflorusa.com

**OTHER COUNTRIES:** Gerflor International  
Tel: +33 (0)4 75 50 68 68 - Fax: +33 (0)4 75 50 69 95  
e-mail: serviceconsol@gerflor.com

# Floors for the Home | gerflor.com

## 2012 Collection



### FIND GERFLOR ON YOUR SMART PHONE

All Gerflor products,  
colours in full screen mode, associated documents.

To connect, <http://m.gerflor.com>  
Or with the help of a «Mobiletag» application,  
scan the code 2D QR code opposite

